..Title 1 2 Accessory Dwelling Units – For the purpose of allowing accessory dwelling units in all zoning districts that allow single-family detached dwellings; establishing use requirements for accessory 3 4 dwelling units; adding certain definitions; making stylistic changes; and generally related to 5 accessory dwelling units. 6 ..Body CITY COUNCIL OF THE 7 City of Annapolis 8 9 Ordinance 39-19 10 11 12 Introduced by: Alderman Gay and Alderman Rodriguez 13 Referred to 14 15 **Planning Commission Rules and City Government Committee** 16 17 180-day Rule: 6/8/20 18 19 AN ORDINANCE concerning 20 21 **Accessory Dwelling Units** 22 23 **FOR** the purpose of allowing accessory dwelling units in all zoning districts that allow singlefamily detached dwellings; establishing use requirements for accessory dwelling units; 24 adding certain definitions; making stylistic changes; and generally related to accessory 25 dwelling units. 26 27 28  $\mathbf{BY}$ repealing and re-enacting with amendments the following portions of the Code of the City of Annapolis, 2019 Edition 29 21.38.020 30 21.48.010 31 21.48.020 32 21.48.030 33 34 21.50.010 21.50.020 35 21.50.030 36 37 21.50.040 21.50.050 38 21.50.060 39 21.50.070 40 21.50.080 41 42 21.50.090 43 21.50.100 21.50.110 44 45 21.50.120 21.50.130 46

21.50.140 1 2 21.50.200 3 21.50.220 4 21.50.240 5 21.50.250 6 21.50.260 7 21.50.270 21.66.130 8 21.72.010 9 10  $\mathbf{BY}$ repealing the following portion of the Code of the City of Annapolis, 2019 Edition 11 12 21.64.010 13 14 BYadding the following portions to the Code of the City of Annapolis, 2019 Edition 21.64.005 15 21.64.010 16 17

18 19

# SECTION I: BE IT ESTABLISHED AND ORDAINED BY THE ANNAPOLIS CITY COUNCIL that the Code of the City of Annapolis shall be amended to read as follows:

202122

#### Title 21 – PLANNING AND ZONING

23 Chapter 38 - REGULATIONS APPLICABLE TO ALL DISTRICTS.

24 25

#### Section 21.38.020 - Uses.

26 27

28

30

31

32 33

34

35

- A. Types of Uses. The following uses of land as listed in this division, are permitted in the districts indicated under the conditions specified:
- 29 1. Permitted uses,
  - 2. Special exception uses,
  - 3. Uses subject to standards, and
  - 4. Accessory uses.
  - B. Use of Land. No building or tract of land shall be devoted to any use other than those listed in Subsection A of this section with the exception of the following:
    - 1. Uses lawfully established on the date of adoption of this Zoning Code, and
    - 2. Uses already lawfully established on or before the date of adoption of this Zoning Code and rendered nonconforming by it. These uses are subject to Chapter 21.68.
- C. Utility Lines and Fixtures Exempted. The following uses are exempted from the provisions of this division and are permitted in any district: poles, wires, cables, conduits, vaults, laterals, pipes, mains, valves, or any other similar distributing equipment for telephone or other communication systems, electric power, gas, water and sewer lines.
- Antennas and telecommunication facilities are not exempted. See regulations in Division V.
- D. Use of Accessory Buildings for Living Purposes. No accessory building or structure constructed on any lot prior to the time of construction of the principal building to which it is accessory shall be used for living purposes. IN ANY DISTRICT, AN EXISTING ACCESSORY STRUCTURE MAY BE CONVERTED TO AN ACCESSORY DWELLING

- UNIT, NOTWITHSTANDING THE REQUIREMENTS OF CHAPTER 21.50, BULK REGULATIONS, PROVIDED THE REQUIREMENTS OF SECTION 21.64.010 RELATED TO STANDARDS FOR USES SUBJECT TO STANDARDS AND SECTION 21.66.130, TABLE OF OFF-STREET PARKING REQUIREMENTS, ARE MET.
- 5 E. Trailers. A trailer shall not be considered to be permissible as an accessory building.
  - F. Tents. No tent may be erected, used or maintained for living quarters or long term storage.

## **Chapter 21.48 - USE TABLES**

## Section 21.48.010 - Table of Uses—Residential Zoning Districts.

9 10 11

13

- P = Permitted Use; S = Special Exception Use; -Std = Use Subject to Standards (Chapter 21.64);
- 12 A = Accessory Use; Blank = Not Permitted
  - A use, including a special exception use, that is not normally permissible as a permitted use or use subject to standards in a zoning district may be permitted in that district as a planned development use pursuant to Section 21.24.020.

1	5
1	6

Uses	Distri ct R1A	Distri ct R1B	Distri ct R1	Distri ct R2	Distri ct R2- NC	Distri ct R3	Distri ct R3- NC	Distri ct R3- NC2	Distri ct R3- R	Distri ct R4	Distri ct R4- R	Distri ct C1	Distri ct C1A
ACCESSO RY ATTACHE D DWELLIN G UNIT	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD
Accessory buildings and uses, including signs	A	A	A-Std	A	A	A	A	A	A	A	A	A	A
ACCESSO RY DETACHE D DWELLIN G UNIT	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD	A- STD
Antennas and amateur radio stations	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std	A-Std
Apartment hotels										P-Std	P-Std		
Bed and breakfast homes					P-Std		P-Std	P-Std				P-Std	P-Std
Bed and breakfast home in a					S-Std								

structure constructed or erected after December 14, 1998 on a vacant lot of record													
Cemeteries	P	P	P	P	P								
Colleges, private	S	S	S	S	S	S	S	S	S	S	S	P	
Day care, family	A-Std												
Day care centers, group, in conjunction with public school facilities			A-Std										
Day care centers, group, including day care centers accessory to a principal religious institution	S	S	S	S	S	S	S	S	S	S	S	S	
Driveways, walkways, parking or access for uses located in an adjacent nonresidenti al district	S	S	S	S	S	S	S	S	S	S	S		
Dwellings, multi- family						S	S	S	S	S	S	S-Std	
Dwellings, multi- family containing six or fewer dwelling units							P-Std						

Dwellings, single- family attached						S	S	S	S	S	S	S-Std	
Dwellings, single- family detached	P	P	P	P	P	P	P	P	P	P	P	P	P
Dwellings, two-family				1		P	P	P	P	P	P	S-Std	S 2

4

5

6

7

## 21.48.020 - Table of Uses—Commercial and Industrial Zoning Districts.

P = Permitted Use; S = Special Exception Use; -Std = Use Subject to Standards (Chapter 21.64);

A = Accessory Use; Blank = Not Permitted

A use, including a special exception use, that is not normally permissible as a permitted use or use subject to standards in a zoning district may be permitted in that district as a planned development use pursuant to Section 21.24.020.

8 9 10

Uses	District B1	District B2	District B3	District B3-CD	District BCE	District BR	District C2	District C2A	District PM2	District I1
ACCESSORY ATTACHED DWELLING UNIT	A-STD						A-STD		A-STD	
Accessory buildings and uses, including signs	A	A	A	A	A	A	A	A	A	A
ACCESSORY DETACHED DWELLING UNIT	A-STD						A-STD		A-STD	
Adult book stores			S-Std	S-Std	S-Std					
Amusement establishments, indoor			P	P	P					
Animal hospitals, including veterinarian offices			S	S	P					
Antenna towers										P-Std, S-Std

Antennas and amateur radio stations	A-Std									
Antique stores	P	P	P	P	P	P	P	P	P 1	
Appliance stores including electrical and household appliances, and radio and television sales and repair		P	P	P	P	P	P	P	P 1	
Arts and crafts stores	P	P	P	P	P	P	P	P	P 1,2	
Arts or cultural centers					P					
Arts and crafts studios	P	P	P	P	P					
Auction rooms			P	P	P					
Bake shops	P-Std									
Bakeries										P
Banks and financial institutions	S-Std	P	P	P	P	P	P	P	P 1,2	
Bars and taverns		S	S	S	S		S			
Bicycle sales, rental and repair stores	P	P	P	P	P	P	P	P		
Boat showrooms			P	P	P					
Building materials sales and storage			S	S	P					P
Cab stands including dispatch offices and related parking facilities					S					
Candy stores, where only candy prepackaged	P	P	P	P	P	P	P-Std			

off the premises is sold										
Candy stores including candy making	S-Std	S-Std	S-Std	S-Std		P-Std	P-Std		P-Std	
Carpet and rug stores, retail sales only		P	P	P	P	P	P	P	P 1	
Catering establishments, where no food, beverages and/or desserts are sold on the premises	P-Std	P-Std	P-Std	P-Std	P-Std	P-Std	P-Std			P-Std
Clubs, lodges and meeting halls, with no on-premises food or beverage preparation facilities		P	P	P	P	P	P	P		
Clubs, lodges and meeting halls, with on- premises food or beverage preparation facilities		S-Std	S-Std	S-Std		P-Std				
Coffee shops	P-Std	P-Std	P-Std	P-Std	P-Std	P-Std	P-Std	P-Std	P-Std	
Contractors', architects' and engineers' offices, shops and yards			S	S						P
Convenience stores	P-Std S-Std	P-Std S-Std	P-Std S-Std	P-Std S-Std	P-Std S-Std	P-Std			P-Std	
Day care centers, group					P				P-Std	
Day care centers, group, in conjunction with a principal religious institution		S-Std								

		I	1	I	I	1			I	I
Delicatessen	P-Std	P-Std	P-Std	P-Std	S-Std	P-Std	S-Std		P-Std	
Department stores		Р	Р	P	P		P			
Drive-through facilities and walkups associated with permitted or special exception uses	P-Std	P-Std S-Std	P-Std S-Std	P-Std S-Std	P-Std S-Std 3	P-Std S-Std	4	4	P-Std	P-Std S-Std
Dry cleaning and laundry drop off and pick up stations	P	P	P	P	P		P	P		
Dry cleaning and laundry establishments		P	P	P	P				P 1,2	P
Dwellings, multi-family					P-Std	P	S		S	
Dwellings, single-family attached							S		S	
Dwellings, single-family detached	P						S		P	
Dwellings, two-family							S		P	
Dwellings above the ground floor of nonresidential uses	P	P			P		P	P		
Dwellings for watchmen and their families, located on the premises where they are employed in that capacity			P	P						P

#### Notes:

Uses in the PM2 district are subject to the following provisions as indicated in the table:

4 5

<sup>1.</sup> This use is permitted as a principal use only in districts that do not adjoin (along non-street frontage) property zoned R1, R1A, R1B or R2.

<sup>2.</sup> This use is permitted as an incidental use in a structure that contains business, professional or governmental offices provided that gross floor area of all incidental uses does not exceed the amount of space devoted to the first

4

5

- floor of a multistory structure; except, that in no case shall it exceed thirty three <u>33</u> percent of the total gross floor area. This use is considered a neighborhood convenience use and is subject to standards given in Section 21.64.420.
- 3. If the principal use with which the drive-thru facility is associated is a special exception use, then the drive-thru facility requires special exception approval.
- 4. ATMs are permitted as walkups subject to all other applicable regulations. In the C2 and C2A districts, drive-through facilities are not permitted.

7 8 9

10

11

## 21.48.030 - Table of Uses—Office and Mixed Use Zoning Districts.

- P = Permitted Use; S = Special Exception Use; -Std = Use Subject to Standards (Chapter 21.64); A = Accessory Use; Blank = Not Permitted
- A use, including a special exception use, that is not normally permissible as a permitted use or use subject to standards in a zoning district may be permitted in that district as a planned development use pursuant to Section 21.24.020

14 15 16

importants The notes at the end (	or the the	re are as m	acii a pai	t of the fat
Uses	District P	District MX	District PM	District C2P
ACCESSORY ATTACHED DWELLING UNIT	A-STD	A-STD	A-STD	A-STD
Accessory Structures and uses	A	A 2	A	A
ACCESSORY DETACHED DWELLING UNIT	A-STD	A-STD	A-STD	A-STD
Antennas and amateur radio stations	A-Std	A-Std	A-Std	A-Std
Antique stores		P	P-Std	
Appliance stores including electrical and household appliances, and radio and television sales and repair		P		
Arts and crafts studios		P	P-Std	
Arts and crafts stores		P	P-Std	
Bank and financial institutions		P		
Bake shops		P-Std		
Cab stands including dispatch offices and related parking facilities		S		
Candy stores, where only candy prepackaged off the premises is sold		P		
Candy stores including candy making		P-Std		
Carpet and rug stores, retail sales only		P		
Catering establishments		P-Std		

Clubs, lodges and meeting halls, with no on-premises food or beverage preparation facilities	S	P	S	S
Clubs, lodges and meeting halls, with on-premises food or beverage preparation facilities		P-Std		
Coffee shops		P-Std		
Conference facilities		S		
Convenience stores		P-Std		
Day care centers, groups	S		S	S
Delicatessens		P-Std	P-Std	
Department stores		P		
Drive-through facilities associated with permitted or special exception uses			S-Std <sup>1</sup>	
Dry cleaning and laundry drop off and pick up stations			P	
Dry cleaning and laundry establishments		P		
Dwellings, multi-family	S	P-Std	S	S
Dwellings, multi-family, containing 12 or fewer units			P-Std	
Dwellings, single-family attached	P	P-Std	P	
Dwellings, single-family detached	P	P	P	P
Dwellings, two-family	P	P	P	P
Dwellings above the ground floor of nonresidential uses		P		

- 1 Footnotes:
- If the principal use with which the drive-thru facility is associated is a special exception use, then the drive-thru facility requires special exception approval.
- 4 The following apply only to the uses specified: in the MX-1 area only, in planned developments with a minimum
- 5 lot size of five acres, "accessory structures" such as clock towers attached to office and/or retail structures and
- 6 "theaters, indoor" shall not exceed one hundred 100 feet in height. See the bulk regulations table in Section 21.50.260.
- 8 Table Notes:

11

12

13

14

18

19 20

21 22

23

24

25

26 27

28

29 30 31

- 9 The following regulations apply to all uses in the MX District:
  - 1. Buildings in excess of forty six 46 feet, but less than fifty five 55 feet in height are subject to the following:
  - a. Either twenty-five 25 percent of the gross floor area shall be designed for retail uses, or residential uses, or a combination of retail and residential uses, alternatively, the entire ground level front façade shall be designed for retail uses, exclusive of: (i) not more than one driveway, which shall not be greater than thirty three 33 feet wide, required for access to parking; (ii) space required for a lobby and space required for access to upper floor uses.
- Retail use along the front façade shall have a minimum height of twelve 12 feet and a minimum depth of twenty five

  25 feet;
  b. If surface parking is located on the zoning lot, it shall be located at the rear of the zoning lot and new structures
  - b. If surface parking is located on the zoning lot, it shall be located at the rear of the zoning lot and new structures shall be located at the front of the zoning lot. If surface parking is located adjacent to single-family residential use, dense plantings shall be installed and maintained on the zoning lot to provide an effective screen; and
  - c. Any adverse impacts on critical lane levels of service at adjoining intersections shall be mitigated by the applicant.
  - 2. Buildings in excess of forty six 46 feet, but less than sixty five 65 feet in height require special exception approval except as provided in note No. 1 above.
  - 3. Uses and combinations of uses located on zoning lots of forty thousand 40,000 square feet or more require special exception approval, unless such uses are approved as part of a planned development.

## Chapter 21.50 - BULK REGULATIONS TABLES Section 21.50.010 - Bulk Regulations Table R1 District.

Permitted uses, special exception uses, and uses subject to specific standards	Lot Dimensions (minimum) Area (sq. ft. or acres) <sup>4</sup>	Lot Dimensi ons (minim um) Width (ft)	Yards (minimu m) Front (ft) <sup>5</sup>	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minimu m) Rear (ft)	Height, Covera ge, Floor Area Ratio (maxim um) Height (stories and feet) <sup>8</sup>	Height, Covera ge, Floor Area Ratio (maxim um) Maxim um Lot Covera ge (percent	Height, Covera ge, Floor Area Ratio (maxim um) Floor Area Ratio	Open Space (minim um, percent
Accessory Uses										
ACCESS ORY ATTACH ED	1,800 SQUARE FEET IN ADDITION	<u>60</u>	<u>25</u>	8	<u>20</u>	<u>30</u>	2.5 STORI ES NOT	30		

DWELLI NG UNIT	TO PRINCIPAL USE REQUIREM ENT.						TO EXCEE D 35 FEET		
ACCESS ORY DETACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>60</u>	<u>30</u>	<u>8</u> 3	20	<u>5</u>	9		
Buildings accessory to single- family dwellings, other than as specified elsewhere in this table			30	8 3	20	5	9		
Clubhous es and other structures on the grounds of private clubs, golf courses, polo and tennis clubs			Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other property lines	from the nearest	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other property lines	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other property lines			
Mausoleu ms, crematori es and columbari ums in cemeterie s			Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other			

		property lines	property lines	property lines	property lines		
Mooring		No	No	No	No		
slip		require	require	require	require		
Silp		ment	ment	ment	ment		

## Notes

1

3

4

7

8

9

10

11

16

17

18

19

20

21

22

23

24

25

26

27 28

29 30 31

- 1. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 2. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 5 3. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only five feet is required. See illustration at Section 21.60.100.
  - 4. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
  - 5. The front yard for principal uses shall be the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
- 6. Each side yard shall meet the minimum requirementS set forth in the table, and the total of both side yards must
   SHALL equal at least twenty 20 percent of the lot width.
- 7. As specified by the decision-making body or official through the zoning decision-making process set forth in
   Division II, Administration.
  - 8. i. Except as provided in subsection (ii) of this note, no A building shall MAY NOT exceed the lesser of either the maximum height in the bulk regulations table or the average height of all structures on the block face.
  - ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant EXISTS, behind the average front setback of ridgelines on the block face, may maintain the height limitation in the bulk regulations table.
  - 9. i. Within five feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of 16 feet.
  - ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.

#### Section 21.50.020 - Bulk Regulations Table R1-A District.

Permitted uses, special exception uses, and uses subject to specific standards	Lot Dimensions (Minimum) Area (sq. ft. or acres) 4, 5	Lot Dimensi ons (Minim um) Width (ft)	Yards (Minim um) Front (ft)	Yards (Minim um) Interior Side (ft)	Yards (Minim um) Corner Side (ft)	Yards (Minim um) Rear (ft)	Height, Covera ge, Floor Area Ratio (maxim um) Height, (stories and feet)	Height, Covera ge, Floor Area Ratio (maxim um) Lot Covera ge, (percent	Height, Covera ge, Floor Area Ratio (maxim um) Floor Area Ratio	Open Space (minim um, (percen t)
Accessory Uses										

ACCESS ORY ATTACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>100</u>	40	<u>12</u>	<u>25</u>	40	2.5 STORI ES NOT TO EXCEE D 35 FEET	<u>30</u>	
ACCESS ORY DETACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>100</u>	<u>45</u>	<u>12 ³</u>	<u>25</u>	<u>5</u>	<u>6</u>		
Buildings accessory to single- family dwellings, other than as specified elsewhere in this table			45	12 4	25	5	7		
Clubhous es and other structures on the grounds of private clubs, golf courses, polo and tennis clubs			Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all other property lines						
Mausoleu ms, crematori es and columbari ums in			Minimu m of 150 feet from the nearest residenti al						

cemeterie		property	property	property			
S		line, 25	line, 25	line, 25	line, 25		
		feet	feet	feet	feet		
		from all	from all	from all	from all		
		other	other	other	other		
		property	property	property	property		
		lines	lines	lines	lines		
Mooring		No	No	No	No		
Mooring		require	require	require	require		
slip		ment	ment	ment	ment		

#### Table Notes:

- 1. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
   Unless the entire structure is located on the rear twenty five 25 percent of the lot, in
  - 3. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only five feet is required. See illustration at Section 21.60.100.
  - 4. Where IF the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
  - 5. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
  - 6. As specified by the decision making body or official through the zoning decision making process set forth in Division II, Administration.
  - 7. i. Within five feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of 16 feet.
  - ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.

## 

## Section 21.50.030 - Bulk Regulations Table R1-B District.

## 

Permitted uses, special exception uses, and uses subject to specific standards	Lot Dimensions (minimum) Area, (sq. ft. or acres) <sup>5</sup>	Lot Dimensi ons (minim um) Width, (ft)	Yards (minimu m) Front (ft)	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minimu m) Rear (ft)	Height, Covera ge, Floor Area Ratio (maxim um) Height, (stories and feet)	Height, Covera ge, Floor Area Ratio (maxim um) Lot Covera ge, (percent)	Height, Covera ge, Floor Area Ratio (maxim um) Floor Area Ratio	Open Space (minim um, percent
Accessory Uses										
ACCESS ORY ATTACH	1,800 SQUARE	801	<u>30</u>	<u>10</u>	<u>15</u>	40	2.5 STORI	<u>30</u>		

ED DWELLI NG UNIT	FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.						ES NOT TO EXCEE D 35 FEET		
ACCESS ORY DETACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>80¹</u>	<u>30</u>	104	<u>15</u>	10	2	<u>30</u>	
Buildings accessory to single- family dwellings, other than as specified elsewhere in this table			30	10 4	15	10	2		
Clubhous es and other structures on the grounds of private clubs, golf courses, polo and tennis clubs			nearest	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all others.	nearest	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all others.			
Mausoleu ms, crematori es and columbari ums in cemeterie s			Minimu m of 150 feet from the nearest residenti al property line, 25	Minimu m of 150 feet from the nearest residenti al property line, 25	Minimu m of 150 feet from the nearest residenti al property line, 25	Minimu m of 150 feet from the nearest residenti al property line, 25			

		feet from all others.	feet from all others.	feet from all others.	feet from all others.		
Off-street parking spaces for single-family detached dwellings		10	10	5	5		
Mooring slip		No require ment	No require ment	No require ment	No require ment		

3

4

5

9

10

13

- 1. In addition, for waterfront lots, forty 40 feet at mean high water line.
- 2. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 3. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 4. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only five feet is required. See illustration at Section 21.60.100.
  - 5. Where IF the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 6. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
  - 7. <u>I</u>. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
- 14 EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
   15 <u>II</u>. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT
   16 FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD
- FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD
   REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF
  - TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

## 19 20 21 22

18

## Section 21.50.040 - Bulk Regulations Table R2 District.

## 23 24

Permitted uses, special exception uses, and uses subject to specific standards	Lot Dimensions (minimum) Area, (sq. ft. or acres) <sup>1</sup>	Lot Dimensi ons (minim um) Width, (ft)	Yards (minimu m) Front (ft) <sup>6</sup>	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Site (ft)	Yards (minim um) Rear (ft)	Height, Coverag e, Floor Area Ratio (maxim um) Height, (stories and feet) <sup>8</sup>	Height, Coverag e, Floor Area Ratio (maxim um) Lot Coverag e, (percent	Coverag e, Floor Area Ratio (maxim um) Floor Area	Open Space (minim um, percent
Accessory Uses										

ACCESS ORY ATTACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>25</u>	<u>6</u>	<u>15</u>	<u>30</u>	2.5 STORI ES NOT TO EXCEE D 35 FEET		
ACCESS ORY DETACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	30	<u>6 <sup>4</sup></u>	<u>15</u>	2	9		
Buildings accessory to single- family dwellings, other than as specified elsewhere in this table			30	64	15	2	9		
Clubhous es and other structures on the grounds of private clubs, golf courses, polo and tennis clubs			Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all others.	Minimu m of 150 feet from the nearest residenti al property line, 25 feet from all others.	from the nearest	Minimu m of 150 feet from the nearest resident ial propert y line, 25 feet from all others.			
Mausoleu ms, crematori es and columbari ums in			Minimu m of 150 feet from the nearest residenti	Minimu m of 150 feet from the nearest residenti	nearest	Minimu m of 150 feet from the nearest			

cemeterie		al	al	al	resident		
S		property	property	property	ial		
		line, 25	line, 25	line, 25	propert		
		feet	feet	feet	y line,		
		from all	from all	from all	25 feet		
		others.	others.	others.	from all		
					others.		
Magning		No	No	No			
Mooring		require	require	require			
slip		ment	ment	ment			

#### Table Notes:

- 1. Where IF the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 2. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 3. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 4. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
- 5. As specified by the decision-making body or official through the zoning decision-making process set forth in
   Division II, Administration.
  - 6. The front yard for principal uses shall be the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
  - 7. Each side yard shall meet the minimum requirementS set forth in the table, and the total of both side yards must SHALL equal at least twenty 20 percent of the lot width.
  - 8. i. Except as provided in subsection (ii) of this note, no A building shall MAY NOT exceed the lesser of either the maximum height in the bulk regulations table or the average height of all structures on the block face.
  - ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant EXISTS, behind the average front setback of ridgelines on the block face, may maintain the height limitation in the bulk regulations table.
  - 9. i. Within five feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of 16 feet.
  - ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.

#### 

## Section 21.50.050 - Bulk Regulations Table R2-NC District.

## 

Permitted uses, special exception uses, and uses subject to specific standards	Lot Dimensions (minimum) Area, (sq. ft. or acres) <sup>1</sup>	Lot Dimensi ons (minim um) Width, (ft)	Yards (minim um) Front (ft) <sup>6</sup>	Yards (minim um) Interior Side (ft) 7,8	Yards (minim um) Corner Side (ft) 7, 8	Yards (minim um) Rear (ft)	Height, Coverag e, Floor Area Ratio (maxim um) Height, (stories and feet) <sup>9</sup>	Height, Coverag e, Floor Area Ratio (maxim um) Lot Coverag e,	Height, Coverag e, Floor Area Ratio (maxim um) Floor Area Ratio	Open Space (minim um, percent)
--	--	--	--	--	---	-------------------------------------	---	---	---	--

								(percent	
Accessor y Uses									
ACCESS ORY ATTACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>25</u>	<u>6</u>	<u>15</u>	<u>30</u>	2.5 STORI ES UP TO 26 FEET OR AVER AGE ON BLOCK FACE NOT TO EXCEE D 35 FEET		
ACCESS ORY DETACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>30</u>	<u>6 <sup>4</sup></u>	<u>15</u>	2	10		
Buildings accessory to single- family dwellings, other than specified elsewhere in this table			30	64	15	2	10		
Clubhous es and other structures on the grounds of private clubs,			Minimu m of 150 feet from the nearest resident ial	Minimu m of 150 feet from the nearest resident ial	Minimu m of 150 feet from the nearest resident ial	Minimu m of 150 feet from the nearest resident ial			

golf courses, polo and tennis clubs			property line, 25 feet from all others.	property line, 25 feet from all others.	property line, 25 feet from all others.	property line, 25 feet from all others.				
Mausoleu ms, crematori es and columbari ums in cemeterie s			Minimu m of 150 feet from the nearest resident ial property line, 25 feet from all others.							
Mooring slip	No requirement	No require ment	No require ment	No require ment	No require ment	No require ment	No require ment	No require ment	No require ment	No require ment

- 1. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent. Garages are typically located at the rear of the property and, if attached, garages facing a public street shall MAY not occupy more than one-third of the front façade and shall be setback from the front façade by five feet or more.
- 2. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 3. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 4. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
  - 5. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
  - 6. i. The front yard for principal uses shall be the lesser of the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
    - ii. Building additions may maintain the front yard of the existing structure.
  - iii. If a structure is demolished for the purposes of new construction, the new structure must SHALL maintain either the front yard of the previously demolished structure or the front yard as required under subsection (i) of this note
  - 7. i. All lots: each side yard shall meet the minimum requirementS set forth in the table.
  - ii. Lots  $\frac{\text{fifty } 50}{\text{feet}}$  feet or greater in width: the total of both side yards shall equal to or greater than  $\frac{\text{twenty five } 25}{\text{percent of the lot width.}}$
  - 8. Rearward building additions may maintain the side yard of the existing structure, except that if such THE addition will impair an adequate supply of light and air to adjacent property or will impede the exterior maintenance of adjacent property, the minimum side yard set forth in the table shall be provided.
  - 9. i. The maximum height of a building or structure is the greater of:
    - (A) A building height of twenty six 26 feet; or
  - (B) The average height of all structures on the block face measured to the highest point of the roof, except that the Delirector of Pplanning and Zzoning may allow a tolerance of no more than ten 10 percent of the average height upon a finding that this tolerance is necessary to provide for adequate living space and that the tolerance will not promote incompatible design or diminish an adequate supply of light and air to adjacent properties, and that this THE tolerance shall DOES not permit buildings greater in height than the maximum height allowed in the underlying zone.

1

- 5 6 7
- 8 9 10 11
- 12 13 14 15
- 16 17 18 19
- 20 21

- 22
- 3

2
2

		0
		4

to the following:
(A) The new construction will not impair an adequate supply of light and air to adjacent property or will impede
the exterior maintenance of adjacent property;
(B) The side façades are not designed as a single plane but are articulated by means of changes in plane,
increased setbacks, offsets, and a change in materials among other design solutions which THAT lessen the potential

lessen the potential impacts of building height; (C) Roof and eave designS are compatible with adjacent and nearby structures and, in the case of an addition, are compatible with the existing house.

ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant

EXISTS, behind the average front setback of ridgelines on the block face, may maintain the ridgeline height subject

- 10. i. Within two feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of 16 feet. The cornice height may be increased to ten 10 feet and the ridge height to twenty 20 feet upon findings by the Planning and Zoning Director that a) physical constraints exist or that the allowance is necessary in order to achieve compatible design, and b) the purpose of this Zoning Code will not be jeopardized.
- ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.

# Section 21.50.060 - Bulk Regulations Table R3 District.

Permitte d uses, special exceptio n uses, and uses subject to specific standards	Densit y (maxi mum, express ed as minim um sq. ft. of lot area per dwellin g unit)	Lot Dimensions (minimum) Area (sq. ft. or acres) <sup>1</sup>	Lot Dimen sions (minim um) Width (ft)	Yards (minim um) Front (ft) <sup>9</sup>	Yards (minim um) Interior Side (ft) <sup>10,</sup>	Yards (minim um) Corner Side (ft) 10,	Yards (minim um) Rear (ft)	Height, Covera ge, Floor Area Ratio (maxi mum) Height, (stories and feet) 11	Height, Covera ge, Floor Area Ratio (maxi mum) Lot Covera ge, (percen t)	Height, Covera ge, Floor Area Ratio (maxi mum) Floor Area Ratio	Open Space (mini mum, percen t)
Accessor y Uses											
ACCESS ORY ATTAC HED DWELLI NG UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>25</u>	<u>5</u>	<u>15</u>	<u>30</u>	2.5 STORI ES NOT TO EXCE ED 35 FEET		1.0 8	
ACCESS ORY DETAC HED		1,800 SQUARE FEET IN ADDITIO		20	57	15	2	12			

DWELLI NG UNIT	N TO PRINCIPA L USE REQUIRE MENT.							
Building s accessor y to single- family dwelling s, other than as specified elsewher e in this table		20	5 7	15	2	12		
		Minim um of	Minim um of	Minim um of	Minim um of			
Clubhous		hundre	hundre	hundre	hundre			
es and other		d fifty 150	d fifty 150	d fifty 150	d fifty 150			
structure		feet	feet	feet	feet			
s on the		from	from	from	from			
grounds of		the nearest	the nearest	the nearest	the nearest			
private		residen	residen	residen	residen			
clubs,		tial	tial	tial	tial			
golf		propert	propert	propert	propert			
courses,		y line,	y line,	y line,	y line,			
polo and tennis		twenty five 25	five 25	five 25	twenty five 25			
clubs		feet	feet	feet	feet			
		from	from	from	from			
		all	all	all	all			
		others.	others.	others.	others.			
Mooring		No	No	No	No			
slip		require	require	require	require			
		ment	ment	ment	ment			

1 2

3

4 5

6

7

8

9

10

- 1. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 2. The minimum total zoning lot area is five thousand four hundred 5,400 square feet. For multi-family and single-family attached uses the maximum number of dwelling units per structure is ten.
- 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 4. Unless the building height exceeds twenty five 25 five feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten 10 percent of the building width or twenty 20 percent of the building height,
- whichever is greater.

- 5. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have corner side yards not less than twenty-five 25 percent of the building width or thirty30 percent of the building height, whichever is greater.
  - 6. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.

- 7. Unless the entire structure is located on the rear twenty-five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
- 8. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the floor area ratio may be increased by twenty 20 percent.
- 9. The front yard for principal uses shall be the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
- 10. Each side yard shall meet the minimum requirementS set forth in the table, and the total of both side yards must SHALL equal at least twenty 20 percent of the lot width.
- 11. i. Except as provided in subsection (ii) of this note, no A building shall MAY NOT exceed the lesser of either the maximum height in the bulk regulations table or the average height of all structures on the block face.
- ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant EXISTS, behind the average front setback of ridgelines on the block face, may maintain the height limitation in the bulk regulations table.
- 12. i. Within five feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of 16 feet.
- ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.
- 13. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
- 14. If the lot is to be subdivided, a minimum lot area of three thousand six hundred 3,600 square feet and a minimum lot width of thirty 30 feet per dwelling unit shall be provided.
- 15. In the case of resubdivision of improved zoning lots, side yard requirements do not apply between attached buildings.

## Section 21.50.070 - Bulk Regulations Table R3-NC District.

Permitte d uses, special exceptio n uses, and uses subject to specific standards	Densit y (maxi mum expres sed as minim um sq. ft. of lot area per dwelli ng unit)	Lot Dimensions (minimum) Area (sq. ft. or acres) <sup>1</sup>	Lot Dimens ions (minim um) Width (ft)	Yards (minim um) Front (ft) <sup>9</sup>	Yards (minim um) Interior Side (ft) 10	Yards (minim um) Corner Side (ft) 10	Yards (minim um) Rear (ft)	Height, Covera ge, Floor Area Ratio (maxi mum) Height, (stories and feet) 11	Height, Covera ge, Floor Area Ratio (maxi mum) Lot Covera ge, (percen t)	Height, Covera ge, Floor Area Ratio (maxi mum) Floor Area Ratio	Open Space (mini mum, percen t)
Accessor y Uses											

ACCESS ORY ATTAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>25</u>	<u>5</u>	<u>15</u>	<u>30</u>	2.5 STORI ES NOT TO EXCE ED 35 FEET	1.0 8	
ACCESS ORY DETAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>20</u>	<u>5 <sup>7</sup></u>	<u>15</u>	2	12		
Building s accessor y to single- family dwelling s, other than as specified elsewher e in this table			20	5 7	15	2	12		
Clubhous es and other structure s on the grounds of private clubs, golf courses, polo and tennis clubs			Minim um of 150 feet from the nearest residen tial propert y line, 25 feet from all others.						
Mooring slip			No require ment	No require ment	No require ment	No require ment			

- 1 1. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public 2 open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two 3 hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 4 2. The minimum total zoning lot area is five thousand four hundred 5,400 square feet. For multi-family and single-5 family attached uses the maximum number of dwelling units per structure is ten.
- 6 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.

8

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

43 44

45 46 47

- 4. Unless the building height exceeds twenty five 25 feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have
- 9 side yards not less than ten 10 percent of the building width or twenty 20 percent of the building height, whichever 10
- 11 5. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have corner side yards 12 not less than twenty five 25 percent of the building width or thirty30 percent of the building height, whichever is 13 14
  - 6. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 15 7. Unless the entire structure is located on the rear twenty five 25 percent of the lot, in which case only two feet is 16 required. See illustration at Section 21.60.100.
  - 8. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the floor area ratio may be increased by twenty 20 percent.
  - 9. The front yard for principal uses shall be the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
  - 10. Each side yard shall meet the minimum requirementS set forth in the table, and the total of both side yards must SHALL equal at least twenty 20 percent of the lot width.
  - 11. i. Except as provided in subsection (ii) of this note, no A building shall MAY NOT exceed the lesser of either the maximum height in the bulk regulations table or the average height of all structures on the block face.
  - ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant EXISTS, behind the average front setback of ridgelines on the block face, may maintain the height limitation in the bulk regulations table.
  - 12. i. Within five feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of sixteen 16 feet. HOWEVER, TThe cornice height may be increased to ten 10 feet and the ridge height to twenty 20 feet upon findings by the Planning and Zoning Director that (a) physical constraints exist or that the allowance is necessary in order to achieve A compatible design, and (b) the purpose of this Zoning Code will not be jeopardized.
  - ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.
- 39 13. As specified by the decision-making body or official through the zoning decision-making process set forth in 40 Division II, Administration.
- 41 14. If the lot is to be subdivided, a minimum lot area of three thousand six hundred 3,600 square feet and a 42 minimum lot width of thirty 30 feet per dwelling unit shall be provided.

#### Section 21.50.080 - Bulk Regulations Table R3-NC 2 District.

d uses, special exceptio n	Densit y, (maxi mum, expres sed as minim	Lot Dimension s (minimum) Area (sq. ft. or acres) <sup>1</sup>	Lot Dimen sions (minim um) Width (ft)	Yards (minim um) Front (ft) 9	Yards (minim um) Interior Side (ft)	Yards (minim um) Corner Side (ft)	Yards (minim um) Rear (ft)			Height, Coverag e, Floor Area Ratio (maximu	Open Space (mini mum, percen t)
-------------------------------------	--	--	---	---	--	--	--	--	--	---	--

subject to specific standard s	um sq. ft. of lot area per dwelli ng unit)							mum) Height, (stories and feet) 11	mum) Lot Covera ge, (percen t)	m) Floor Area Ratio	
Accessor y Uses											
ACCES SORY ATTAC HED DWELL ING UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>25</u>	5 10	<u>15</u>	<u>30</u>	2.5 STORI ES NOT TO EXCE ED 35 FEET		1.0 8	
ACCES SORY DETAC HED DWELL ING UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>20</u>	<u>5 7</u>	<u>15</u>	2	12		0.25 OF THE PRINCI PAL STRUC TURE	
Building s accessor y to single- family dwelling s				20	5 7	15	2	12		0.25 of the principal structure	
Clubhou ses and other structure s on the grounds of private clubs, golf courses, polo and tennis clubs				Minim um of 150 feet from the nearest residen tial propert y line, 25 feet from all others.							

Mooring slip		No	No	No	No		
	reg	quire	require	require	require		
	m	nent	ment	ment	ment		

1 2

3

4

5

6

7

8

13 14

15 16

17

18

19

20

21

22

23

24 25

26

27 28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

- 1. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 2. The minimum total zoning lot area is five thousand four hundred 5,400 square feet. For multi-family and single-family attached uses the maximum number of dwelling units per structure is ten.
- 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 4. Unless the building height exceeds twenty five 25 feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten 10 percent of the building width or twenty 20 percent of the building height, whichever is greater.
  - 5. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have corner side yards not less than twenty-five 25 percent of the building width or thirty30 percent of the building height, whichever is greater.
    - 6. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
    - 7. Unless the entire structure is located on the rear twenty-five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
    - 8. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the floor area ratio may be increased by twenty 20 percent.
    - 9. i. The front yard for principal uses shall be the lesser of the minimum specified in the table or the established front yard pursuant Chapter 21.38.
      - ii. Building additions may maintain the front yard of the existing structure.
    - iii. If a structure is demolished for the purposes of new construction, the new structure must SHALL maintain either the front yard of the previously demolished structure or the front yard as required under subsection (i) of this note.
    - 10. Rearward building additions may maintain the side yard of the existing structure, except that if such THE addition will impair an adequate supply of light and air to adjacent property or will impede the exterior maintenance of adjacent property, the minimum side yard set forth in the table shall be provided.
    - 11. i. Except as provided in subsection (ii) of this note, no A building shall MAY NOT exceed the lesser of either the maximum height in the bulk regulations table or the average height of all structures on the block face.
    - ii. The height of an addition built behind the ridgeline of an existing structure shall not exceed the height limitation of the underlying zone.
    - 12. Maximum cornice height of eight feet and maximum ridge height of sixteen feet. These limits are subject to adjustment in one of two ways:
    - i. The cornice height may be increased to ten feet and the ridge height to twenty feet upon findings by the Planning and Zoning Director that a) physical constraints exist or that the allowance is necessary in order to achieve compatible design, and b) the purpose of this Zoning Code will not be jeopardized.
    - ii. The cornice and ridge heights may increase one foot for each one foot of additional setback beyond, up to a maximum cornice height of ten feet and a maximum ridge height of twenty feet.
  - I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET. HOWEVER, THE CORNICE HEIGHT MAY BE
- 44 INCREASED TO 10 FEET AND THE RIDGE HEIGHT TO 20 FEET UPON FINDINGS BY THE PLANNING
- 45 AND ZONING DIRECTOR THAT (A) PHYSICAL CONSTRAINTS EXIST OR THAT THE ALLOWANCE IS
- 46 NECESSARY IN ORDER TO ACHIEVE A COMPATIBLE DESIGN, AND (B) THE PURPOSE OF THIS
- 47 ZONING CODE WILL NOT BE JEOPARDIZED.
- 48 II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT
- 49 FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD
- 50 REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES
- 51 ADJACENT TO AN ALLEY, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT
- 52 OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

14. If the lot is to be subdivided, a minimum lot area of three thousand six hundred 3,600 square feet and a minimum lot width of thirty 30 feet per dwelling unit shall be provided.

7

## Section 21.50.090 - Bulk Regulations Table R3-R District.

8 9

p or tot	1100 1110	notes at the	Ond or	mic taci	o are as	iiiacii a	Puri or i	110 1011	as the ta	CIC IUSC	
Permitte d uses, special exceptio n uses, and uses subject to specific standards	Densit y (maxi mum, express ed as minim um sq. ft. of lot area per dwellin g unit)	Lot Dimensions (minimum) Area (sq. ft. or acres) <sup>1</sup>	Lot Dimen sions (minim um) Width (ft)	Yards (minim um) Front (ft) <sup>9</sup>	Yards (minim um) Interior Side (ft) <sup>10,</sup> 15, 16	Yards (minim um) Corner Side (ft) 15	Yards (minim um) Rear (ft) <sup>17</sup>	Height, Covera ge, Floor Area Ratio (maxi mum) Height, (stories and feet) 11	Height, Covera ge, Floor Area Ratio (maxi mum) Lot Covera ge, (percen t)	Height, Covera ge, Floor Area Ratio (maxi mum) Floor Area Ratio	Open Space (mini mum, percen t)
Accessor y Uses											
ACCESS ORY ATTAC HED DWELLI NG UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>25</u>	<u>5</u>	<u>5</u>	<u>30</u>	2.5 STORI ES NOT TO EXCE ED 35 FEET		1.0 8	
ACCESS ORY DETAC HED DWELLI NG UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	<u>20</u>	<u>5 7</u>	<u>15</u>	<u>2</u>	12			
Building s accessor y to single- family dwelling s, other				20	5 7	15	2	12			

than as specified elsewher e in this table							
Clubhous es and other structure s on the grounds of private clubs, golf courses, polo and tennis clubs		Minim um of 150 feet from the nearest residen tial propert y line, 25 feet from all others.					
Mooring slip		No require ment	No require ment	No require ment	No require ment		

- 1. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 2. The minimum total zoning lot area is five thousand four hundred 5,400 square feet. For multi-family and single-family attached uses the maximum number of dwelling units per structure is ten.
- 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 4. The building height exceeds twenty-five <u>25</u> feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty <u>50</u> feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten <u>10</u> percent of the building width or twenty <u>20</u> percent of the building height, whichever is greater.
- 5. Corner side yards are not required, except in the case where WHEN there is an established front yard in the remainder of the block. In such cases, the corner side yard shall be provided in accordance with the established-front-yard regulations pursuant to Chapter 21.38.
- 6. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
  - 7. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
  - 8. Where IF the front, side, or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the floor area ratio may be increased by twenty 20 percent.
  - 9. i. The front yard for principal uses shall be the lesser of the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
    - ii. Building additions may maintain the front yard of the existing structure.
  - iii. If a structure is demolished for the purposes of new construction, the new structure must SHALL maintain either the front yard of the previously demolished structure or the front yard as required under subsection (i) of this note.
- 10. Each side yard shall meet the minimum requirementS set forth in the table, and the total of both side yards must SHALL equal at least twenty 20 percent of the lot width.
  - 11. i. Except as provided in subsections (ii) and (iii) of this note, no A building shall MAY NOT exceed the lesser of either the maximum height in the bulk regulations table or the average height of all structures on the block face.

- 1 2 3 4

- ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant EXISTS, behind the average front setback of ridgelines on the block face, may maintain the height limitation in the bulk regulations table.
- iii. The Director of Planning and Zoning may grant a ten 10 percent adjustment to the average height of all structures on the block face in subsection (i) of this note, pursuant to the procedures set forth in Chapter 21.18 of this Zoning Code. This adjustment shall not be construed to permit buildings greater in height than the maximum height allowed in the district.
- 12. i. Within two feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of sixteen 16 feet. HOWEVER, The cornice height may be increased to ten 10 feet and the ridge height to twenty 20 feet upon findings by the Planning and Zoning Director that (a) physical constraints exist or that the allowance is necessary in order to achieve A compatible design, and (b) the purpose of this Zoning Code will not be jeopardized. ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional
- setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum
- height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.
- 13. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
- 14. If the lot is to be subdivided, a minimum lot area of three thousand six hundred 3,600 square feet and a minimum lot width of thirty 30 feet per dwelling unit shall be provided.
- 15. In the case of resubdivision of improved zoning lots, side yard requirements do not apply between attached buildings.
- 16. Rearward building additions may maintain the side yard of an existing structure, except that if such THE addition will impair an adequate supply of light and air to adjacent property or will impede the exterior maintenance of adjacent property, the minimum side yard set forth in the table shall be provided.
- 17. Building additions may maintain the rear yard of an existing structure except that if such THE addition will impair an adequate supply of light and air to adjacent property or will impede the exterior maintenance of adjacent property, the minimum rear yard set forth in the table shall be provided.

## Section 21.50.100 - Bulk Regulations Table R4 District.

Permitte d uses, special exceptio n uses, and uses subject to specific standards	Densit y (maxi mum, express ed as minim um sq. ft. of lot area per dwellin g unit)	Lot Dimensions (minimum) Area (sq. ft. or acres) <sup>1</sup>	Lot Dimen sions (minim um) Width (ft)	Yards (minim um) Front (ft)	Yards (minim um) Interior Side (ft) 12	Yards (minim um) Corner Side (ft) 12	Yards (minim um) Rear (ft)	Height, Covera ge, Floor Area Ratio (maxi mum) Height, (stories and feet)	Height, Covera ge, Floor Area Ratio (maxi mum) Lot Covera ge, (percen t)	Height, Covera ge, Floor Area Ratio (maxi mum) Floor Area Ratio	Open Space (mini mum, percen t)
Dwelling s, single- family detached		4,800	40	15	5	15	30	2.5 stories not to exceed 35 feet		1.0 9	

Accessor y Uses									
ACCESS ORY ATTAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>40</u>	<u>15</u>	<u>5</u>	<u>15</u>	<u>30</u>	2.5 STORI ES NOT TO EXCE ED 35 FEET	1.0 9	
ACCESS ORY DETAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>40</u>	<u>15</u>	<u>5 8</u>	<u>10</u>	<u>2</u>	<u>13</u>		
Building s accessor y to single- family dwelling s, other than as specified elsewher e in this table			15	5 8	10	2	13		
Clubhous es and other structure s on the grounds of private clubs, golf courses, polo and tennis clubs			Minim um of one hundre d fifty 150 feet from the nearest residen tial propert y line, twenty five 25 feet from all others.	Minim um of one hundre d fifty 150 feet from the nearest residen tial propert y line, twenty five 25 feet from all others.	Minim um of one hundre d fifty 150 feet from the nearest residen tial propert y line, twenty five 25 feet from all others.	Minim um of one hundre d fifty 150 feet from the nearest residen tial propert y line, twenty five 25 feet from all others.			

Mooring slip		No	No	No	No		
		require	require	require	require		
		ment	ment	ment	ment		

- 1. Where the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 2. The minimum total zoning lot area is four thousand eight hundred 4,800 square feet. If seventy five 75 percent or more of the required off-street parking spaces are provided underground or within a structure, the minimum lot area shall be one thousand 1,000 square feet per dwelling unit.
- 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 4. Unless the building height exceeds twenty five 25 feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten 10 percent of the building width or twenty 20 percent of the building height, whichever is greater.
  - 5. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have corner side yards not less than twenty five 25 percent of the building width or thirty30 percent of the building height, whichever is greater.
  - 6. If seventy-five <u>75</u> percent or more of the required off-street parking spaces are provided underground or in a structure, the maximum allowable floor area ratio is 2.2.
- 19 7. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 8. Unless the entire structure is located on the rear twenty-five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
  - 9. Where the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the floor area ratio may be increased by twenty 20 percent.
  - 10. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
  - 11. If the lot is to be subdivided, a minimum lot area of two thousand four hundred 2,400 square feet and a minimum lot width of thirty 30 feet per dwelling unit shall be provided.
  - 12. In the case of resubdivision of improved zoning lots, side yard requirements do not apply between attached buildings.
  - 13. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
  - II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

#### Section 21.50.110 - Bulk Regulations Table R4-R District.

Permitte d uses, special exceptio n uses, and uses subject to	Densit y, (maxi mum, express ed as minim um sq. ft.	Lot Dimensions (minimum) Area (sq. ft. or acres) <sup>1</sup>	Lot Dimens ions (minim um) Width (ft)	Yards (minim um) Front (ft) 12	Yards (minim um) Interior Side (ft) <sup>13</sup>	Yards (minim um) Corner Side (ft)	Yards (minim um) Rear (ft) 15	Height, Covera ge, Floor Area Ratio (maxi mum) Height, (stories	Height, Covera ge, Floor Area Ratio (maxi mum) Lot Covera	Height, Covera ge, Floor Area Ratio (maxi mum) Floor	Open Space (mini mum, percen t)
---	--	--	---	--	--	--	---	--	--	--	--

specific standards	of lot area per dwellin g unit)							and feet) <sup>16</sup>	ge, (percen t)	Area Ratio	
Accessor y Uses											
ACCESS ORY ATTAC HED DWELLI NG UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>40</u>	<u>15</u>	<u>5</u>	14	<u>30</u>	2.5 STORI ES NOT TO EXCE ED 35 FEET		1.0 9	
ACCESS ORY DETAC HED DWELLI NG UNIT		1,800 SQUARE FEET IN ADDITIO N TO PRINCIPA L USE REQUIRE MENT.	<u>40</u>	<u>15</u>	<u>5 8</u>	<u>10</u>	<u>2</u>	17			
Building s accessor y to single- family dwelling s, other than as specified elsewher e in this table				15	5 8	10	2	17			
Clubhous es and other structure s on the grounds of private clubs, golf courses, polo and				Minim um of one hundre d-fifty 150 feet from the nearest residen tial propert	Minim um of one hundre d fifty 150 feet from the nearest residen tial propert	Minim um of one hundre d fifty 150 feet from the nearest residen tial propert	Minim um of one hundre d-fifty 150 feet from the nearest residen tial propert				

tennis	y line, y line, y line, y line,	
clubs	twenty- twenty- twenty- twenty	
	five 25   five 25   five 25   -five	
	feet feet <u>25</u> feet	
	from from from	
	all all all all	
	others. others. others.	
Marian	No No No	
Mooring	require require require	
slip	ment ment ment	

- 1. Where the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the required area may be reduced by twenty 20 percent.
- 2. The minimum total zoning lot area is four thousand eight hundred 4.800 square feet. If seventy five 75 percent or more of the required off-street parking spaces are provided underground or within a structure, the minimum lot area shall be one thousand 1,000 square feet per dwelling unit.
- 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 4. Unless the building height exceeds twenty-five 25 feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten 10 percent of the building width or twenty 20 percent of the building height, whichever is greater.
  - 5. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have corner side yards not less than twenty five 25 percent of the building width or thirty 30 percent of the building height, whichever is greater.
  - 6. If seventy five <u>75</u> percent or more of the required off-street parking spaces are provided underground or in a structure, the maximum allowable floor area ratio is 2.2.
  - 7. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
  - 8. Unless the entire structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
  - 9. Where the front, side or rear lot line of a residential lot adjoins an accessible and usable common or public open space which THAT is at least five acres in area and of a depth perpendicular to the lot line of not less than two hundred 200 feet, the floor area ratio may be increased by twenty 20 percent.
  - 10. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
  - 11. If the lot is to be subdivided, a minimum lot area of two thousand four hundred 2,400 square feet and a minimum lot width of thirty 30 feet per dwelling unit shall be provided.
  - 12. i. The front yard for principal uses shall be the lesser of the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
    - ii. Building additions may maintain the front yard of the existing structure.
  - iii. If a structure is demolished for the purposes of new construction, the new structure must SHALL maintain either the front yard of the previously demolished structure or the front yard as required under subsection (i) of this note.
  - 13. Rearward building additions may maintain the side yard of an existing structure, except that if such THE addition will impair an adequate supply of light and air to adjacent property or will impede the exterior maintenance of adjacent property, the minimum side yard set forth in the table shall be provided.
  - 14. Corner side yards are not required, except in the case where WHEN there is an established front yard in the remainder of the block. In such cases, the corner side yard shall be provided in accordance with the established-front-yard regulations pursuant to Chapter 21.38.
- 15. Building additions may maintain the rear yard of an existing structure except that if such THE addition will impair an adequate supply of light and air to adjacent property or will impede the exterior maintenance of adjacent property, the minimum rear yard set forth in the table shall be provided.

- 1 2 3 4
- 5

bulk regulations table.

allowed in the district.

- 6 7 8 9 10
- 11 12 13 14 15 16 17
- 18 19
- 20

- 21 22
- Section 21.50.120 Bulk Regulations Table C1 District.
- **Important.** The notes at the end of the table are as much a part of the law as the table itself.

16. i. Except as provided in subsections (ii) and (iii) of this note, no A building shall MAY NOT exceed the lesser

of either the maximum height in the bulk regulations table or the average height of all structures on the block face.

ii. New construction behind the ridgeline (i.e., roofline) of an existing structure, or if no structure is extant

EXISTS, behind the average front setback of ridgelines on the block face, may maintain the height limitation in the

iii. The Director of Planning and Zoning may grant a ten 10 percent adjustment to the average height of all

structures on the block face in subsection (i) of this note, pursuant to the procedures set forth in Chapter 21.18 of this

Zoning Code. This adjustment shall not be construed to permit buildings greater in height than the maximum height

17. i. Within two feet of any property line except rear property lines adjacent to an alley: EXCEPT AS PROVIDED

IN SUBSECTION II OF THIS NOTE, maximum cornice height of eight feet and maximum ridge height of sixteen

necessary in order to achieve A compatible design, and (b) the purpose of this Zoning Code will not be jeopardized.

ii. The cornice and ridge heights of an accessory structure may increase one foot for each one foot of additional

setback PROVIDED beyond two feet THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK

REGULATIONS TABLE, EXCEPT FROM PROPERTY LINES ADJACENT TO AN ALLEY, up to a maximum

16 feet. HOWEVER, #The cornice height may be increased to ten 10 feet and the ridge height to twenty 20 feet

upon findings by the Planning and Zoning Director that (a) physical constraints exist or that the allowance is

height of two stories and/or a cornice height of sixteen 16 feet and a ridge height of compatible design.

Permitted uses, special exception uses, and uses subject to specific standards	Floor Area Ratio (maximu m)	Density (maximu m, expresse d as minimu m sq. ft. of lot area per dwelling unit)	Lot Dimensions (minimum) Area (sq. ft. or acres)	Lot Dimensio ns (minimu m) Width (ft)	Yards (minimu m) Front (ft)	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minimu m) Rear (ft)	Height, maxim um (feet)
Accessory Uses									
ACCESSO RY ATTACHE D DWELLIN G UNIT	2.0		1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREME NT.	<u>25</u>	1	2	3	<u>30</u>	4
ACCESSO RY DETACHE D	2.0		1,800 SQUARE FEET IN ADDITION TO	PER THE PRINCIP AL USE	1	<u>5 <sup>5</sup></u>	3	<u>2</u>	4

DWELLIN G UNIT		PRINCIPAL USE REQUIREME NT.						
Accessory buildings and structures	2.0	Per the principal use	Per the principal use	1	5 5	3	2	4
Mooring slip				No requirem ent	No requirem ent	No requirem ent	No requirem ent	

- 1. Front yards are not required, except in the case of an established front yard pursuant to Chapter 21.38.
- 2. Side yards are not required, but where WHEN a side yard is provided it shall be not less than five feet. See also Chapter 21.56 for modifications to the side yard requirements.
  - 3. Corner side yards are not required, except in the case where WHEN there is an established front yard in the remainder of the block. In those cases, the corner side yard shall be provided in accordance with the established-front-yard regulations pursuant to Chapter 21.38.
  - 4. In the historic district, special height measurement and limits requirements apply, see Chapter 21.56.
- 5. Unless the entire accessory structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.

### Section 21.50.130 - Bulk Regulations Table C1-A District.

Permitted uses, special exception uses, and uses subject to specific standards	Floor Area Ratio (maximu m)	Density (maximu m, expresse d as minimu m sq. ft. of lot area per dwelling unit)	Lot Dimensions (minimum) Area (sq. ft. or acres)	Lot Dimensio ns (minimu m) Width (ft)	Yards (minimu m) Front (ft)	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minimu m) Rear (ft)	Height (maximu m, feet)
Accessory Uses									
ACCESSO RY ATTACH ED DWELLIN G UNIT	2.0		1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE	<u>25</u>	1	2	3	<u>30</u>	4

		REQUIREM ENT.						
ACCESSO RY DETACH ED DWELLIN G UNIT	2.0	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	PER THE PRINCIP AL USE	1	55	3	<u>2</u>	4
Accessory buildings	2.0	Per the principal use	Per the principal use	1	5 5	3	2	4
Mooring slip				No requirem ent	No requirem ent	No requirem ent	No requirem ent	

1

3

4

5

6 7

8

9

10

11

12

13 14 15

16 17

- 1. Front yards are not required, except in the case of an established front yard pursuant to Chapter 21.38.
- 2. Side yards are not required, but where WHEN a side yard is provided it shall be not less than five feet.
- 3. Corner side yards are not required, except in the case where WHEN there is an established front yard in the remainder of the block. In those cases, the corner side yard shall be provided in accordance with the established-front-yard regulations pursuant to Chapter 21.38.
- 4. In the historic district, special height measurement and limits requirements apply, see Chapter 21.56.
- 5. Unless the entire accessory structure is located on the rear twenty five <u>25</u> percent of the lot, in which case only two feet is required. See illustration at Section 21.60.100.
- 6. In the case of existing buildings, lot size and width requirements shall be determined through the special exception process, pursuant to Chapter 21.26.

### 21.50.140 - Bulk Regulations Table B1 District.

Permitted uses, special exception uses, and uses subject to specific standards	Lot Area (minimum, sq. ft.)	Yards (minimu m) Front (ft)	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minim um) Rear (ft)	Floor Area (maxim um, square feet)	Floor Area Ratio (maxim um)	Height	Locatio n
Business establish ment	2,400	15 <sup>2</sup>	0 2	15 <sup>2</sup>	0 2	7,000 <sup>3</sup>	1.5	2.5 stories not to	4

								exceed 35 feet	
Dwelling s above the ground floor of non residentia l uses	2,400 per dwelling unit <sup>5</sup>	Per business establish ments	Per business establish ments	Per business establish ments	30			2.5 stories not to exceed 35 feet	6
Dwelling s, single- family detached	4,800	15	5	10	30		1.5	2.5 stories not to exceed 35 feet	
Group homes	4,800	15	5	15	30		1.5	2.5 stories not to exceed 35 feet	
Other Uses	Bulk regulations shall be determined through the site design plan review, planned development, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	Bulk regulation s shall be determine d through the site design plan review, planned developm ent, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	Bulk regulation s shall be determine d through the site design plan review, planned developm ent, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	Bulk regulation s shall be determine d through the site design plan review, planned developm ent, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	Bulk regulations shall be determined through the site design plan review, planned development, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	special exception n processes,	Bulk regulations shall be determined through the site design plan review, planned development, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	Bulk regulations shall be determined through the site design plan review, planned development, or special exception processes, pursuant to Chapters 21.22, 21.24, and 21.26.	Bulk regulatio ns shall be determin ed through the site design plan review, planned develop ment, or special exceptio n processe s, pursuant to Chapters 21.22, 21.24, and 21.26.
ACCESS ORY USES									

ACCESS ORY ATTAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPA L USE REQUIRE MENT.	<u>15</u>	<u>5</u>	<u>10</u>	<u>30</u>	1.0 8	2.5 STORI ES NOT TO EXCEE D 35 FEET	
ACCESS ORY DETAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPA L USE REQUIRE MENT.	<u>15</u>	<u>5 <sup>7</sup></u>	<u>10</u>	<u>2</u>		9	

1

2

3

12

16

18

19

20 21

22

23

24

- 1. The front yard for principal uses shall be the minimum specified in the table or the established front yard pursuant to Chapter 21.38.
- 2. In addition to required yards, transitional yards may be required as set forth in the following table. Screening such as with a wall, fence or densely planted compact plantings may be required, as determined through the site plan design review process.
- 7 3. Per business establishment, exclusive of floor area devoted to off-street parking and loading facilities.
- 8 4. Business uses are not permitted on any floor above the ground floor, except in those buildings or structures where9 dwelling units are not established.
- 5. In addition to the area for the business establishment.
- 11 6. Dwelling units in conjunction with business establishments are not permitted below the second floor of buildings.
  - 7. UNLESS THE ENTIRE STRUCTURE IS LOCATED ON THE REAR 25 PERCENT OF THE LOT, IN
- 13 WHICH CASE ONLY TWO FEET IS REQUIRED. SEE ILLUSTRATION AT SECTION 21.60.100.
- 14 8. WHERE THE FRONT, SIDE OR REAR LOT LINE OF A RESIDENTIAL LOT ADJOINS AN ACCESSIBLE
- 15 AND USABLE COMMON OR PUBLIC OPEN SPACE THAT IS AT LEAST FIVE ACRES IN AREA AND OF
  - A DEPTH PERPENDICULAR TO THE LOT LINE OF NOT LESS THAN 200 FEET, THE FLOOR AREA
- 17 RATIO MAY BE INCREASED BY 20 PERCENT.
  - 9. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
  - II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

Situation	Required transitional yard
Extension of the front lot line would coincide with the front lot line of an adjacent lot located in a residential district	25-foot front yard
Extension of a side lot line would coincide with the front lot line of an adjacent lot located in a residential district	15-foot side yard

Extension of a side lot line would coincide with a side lot line of an adjacent lot located in a residential district	15-foot side yard
Interior side yard coincides with a side lot line in an adjacent residential district	10-foot side yard
Interior side yard coincides with a rear lot line in an adjacent residential district	10-foot side yard
Rear yard coincides with side lot line in an adjacent residential district	10-foot rear yard
Rear yard coincides with rear lot line in an adjacent residential district	30-foot rear yard

## 21.50.200 - Bulk Regulations Table C2 District.

impor tanta	· The note	s at the end of	the table	arc <del>as mic</del>	<del>ien a</del> part	or the lav	w <del>as the</del>	table it.	<del>3011</del> .
Permitted uses, special exception uses, and uses subject to specific standards	Floor Area Ratio (maximu m)	Lot Area (minimum, sq. ft.)	Lot width (minimu m, feet)	Yards (minimu m) Front (ft)	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minim um) Rear (ft)	Heigh t	Living Space (minimu m gross sq. ft.)
All uses unless otherwise specified	2.0	1,500	20	1	0	2	30	3	
Dwellings above the ground floor of non- residential uses	2.0	No additional lot area requirement							Efficien cy apartme nt: 300 <sup>4</sup> One bedroom apartme nt: 450 <sup>4</sup> Two- bedroom apartme nt: 600 <sup>4</sup> Each addition al bedroom : 150 <sup>4</sup>

ACCESSO RY USES								
ACCESSO RY ATTACH ED DWELLIN G UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>20</u>	<u>1</u>	<u>0</u>	2	<u>30</u>	3	
ACCESSO RY DETACH ED DWELLIN G UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>20</u>	<u>1</u>	<u>0</u>	<u>2</u>	<u>2<sup>6</sup></u>	3,7	

- 1. Front yards are not required, except in the case of an established front yard pursuant to Chapter 21.38.
- 2. Corner side yards are not required, except in the case where there is an established front yard in the remainder of the block. In those cases, the corner side yard shall be provided in accordance with the established-front-yard regulations pursuant to Section Chapter 21.38.
- 3. In the historic district, special height measurement and limits requirements apply, see Chapter 21.56.
- 4. The minimum space requirements may not be reduced by a variance from the Board of Appeals.
- 5. UNLESS THE ENTIRE STRUCTURE IS LOCATED ON THE REAR 25 PERCENT OF THE LOT, IN WHICH CASE ONLY TWO FEET IS REQUIRED. SEE ILLUSTRATION AT SECTION 21.60.100.
- 6. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
- II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

#### 21.50.220 - Bulk Regulations Table PM2 District.

Permitt ed uses, special excepti on uses, and	Dimensio	Lot Dimen sions (mini mum) Width (ft)	Yards (mini mum) Front (ft)	(mini mum)	Yards (mini mum) Corne r Side (ft)	Yards (mini mum) Rear (ft)	Yards (minimu m) Bufferya rd	Open Space (mini mum landsc aped area)	Lot covera ge (maxi mum)	Floor Area Ratio (maxim um)	Height (maxi mum, stories and feet)
---	----------	---	---	---------------	---	--	--	--	--------------------------------------	---	-------------------------------------

uses subject to specific standar ds										
Dwelli ngs, multi- family	3,600 per dwelling unit	50	20 <sup>3</sup>	5 4	15 <sup>2</sup>	30	1. Adjacent to roads designat ed minor arterial or major arterial in the Compre hensive Plan: 50 foot landscap ed bufferya rd adjacent to parking or parking circulati on areas.			
							2. Adjacent to other roads: 20 foot landscap ed bufferya rd.	15 perce nt of lot area	2.0	
Dwelli ngs, single- family attache d	3,600	16	20 <sup>3</sup>		15 <sup>2</sup>	30	1. Adjacent to roads designat ed minor arterial or major arterial in the	15 perce nt of lot area	2.0	

							Comprehensive Plan: 50 foot landscap ed bufferya rd adjacent to parking or parking circulati on areas. 2. Adjacent to other roads: 20 foot landscap ed bufferya rd.			
Dwelli ngs, single- family detache d	3,600	25	25	5	15	30	1. Adjacent to roads designat ed minor arterial or major arterial in the Compre hensive Plan: 50 foot landscap ed bufferya rd adjacent to parking or parking circulati on areas. 2.	15 perce nt of lot area	2.0	

							Adjacent to other roads: 20 foot landscap ed bufferya rd.				
Dwelli ngs, two- family	7,200	16	20 3	5 4	15 <sup>2</sup>	30	1. Adjacent to roads designat ed minor arterial or major arterial in the Compre hensive Plan: 50 foot landscap ed bufferya rd adjacent to parking or parking circulati on areas. 2. Adjacent to other roads: 20 foot landscap ed bufferya rd.	15 perce nt of lot area		2.0	
Busines s uses	3 acres <sup>1</sup>		40 5	25 <sup>5</sup>	30 <sup>5</sup>	30 <sup>5</sup>	1. Adjacent to roads designat ed minor arterial or major arterial	15 perce nt of lot area	33 percen t of lot area	0.6; 0.25 for neighbo rhood conveni ence shoppin g uses	and

							in the Compre hensive Plan: 50 foot landscap ed bufferya rd adjacent to parking or parking circulati on areas. 2. Adjacent to other roads: 20 foot landscap ed bufferya rd.				ts: 2.5 stories not to excee d 35 feet. 2. In areas adjace nt to all other distric ts: four stories not to excee d 48 feet.
Offices , busines s and professi onal	3 acres <sup>1</sup>	250	40 5	25 <sup>5</sup>	30 5	30 <sup>5</sup>	1. Adjacent to roads designat ed minor arterial or major arterial in the Compre hensive Plan: 50 foot landscap ed bufferya rd adjacent to parking or parking circulati on areas.	15 perce nt of lot area	33 percen t of lot area	0.6	1. In areas adjace nt to R1 and R2 distric ts: 2.5 stories not to excee d 35 feet. 2. In areas adjace nt to all other distric ts: four stories

							2. Adjacent to other roads: 20 foot landscap ed bufferya rd.				not to excee d 48 feet.
Offices , nonprof it, educati onal, cultural , or civic	6,000	50	40 5	25 <sup>5</sup>	30 5	30 5	1. Adjacent to roads designate d minor arterial or major arterial in the Compreh ensive Plan: 50 foot landscape d bufferyar d adjacent to parking or parking circulatio n areas. 2. Adjacent to other roads: 20 foot landscape d bufferyar d.	15 percen t of lot area	33 percent of lot area	0.6	1. In areas adjace nt to R1 and R2 district s: 2.5 stories not to exceed 35 feet. 2. In areas adjace nt to all other district s: four stories not to exceed 48 feet.
Education al and cultural institution s	Bulk regulations shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulations shall be determined through the site design plan review and/or planned developmen t processes, pursuant to Chapters	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop	Bulk regulations shall be determined through the site design plan review and/or planned developme nt processes,	Bulk regulatio ns shall be determin ed through the site design plan review and/or planned develop

	21.22, and 21.24	ment processes , pursuant to Chapters 21.22, and 21.24	ment processe s, pursuant to Chapters 21.22, and 21.24	ment processe s, pursuant to Chapters 21.22, and 21.24	ment processe s, pursuant to Chapters 21.22, and 21.24	ment processe s, pursuant to Chapters 21.22, and 21.24	21.22, and 21.24	ment processe s, pursuant to Chapters 21.22, and 21.24	ment processes , pursuant to Chapters 21.22, and 21.24	pursuant to Chapters 21.22, and 21.24	ment processe s, pursuant to Chapters 21.22, and 21.24
Religio us instituti ons	20,000	90	40 5	25 5	30 5	30 5	1. Adjacent to roads designate d minor arterial or major arterial in the Compreh ensive Plan: 50 foot landscape d bufferyar d adjacent to parking or parking or parking circulatio n areas. 2. Adjacent to other roads: 20 foot landscape d bufferyar d.	15 percen t of lot area	33 percent of lot area	0.6	1. In areas adjace nt to R1 and R2 district s: 2.5 stories not to exceed 35 feet. 2. In areas adjace nt to all other district s: four stories not to exceed 48 feet.
ACCES SORY USES											
ACCES SORY ATTAC HED DWEL LING UNIT	1,800 SQUARE FEET IN ADDITIO N TO PRINCIP AL USE REQUIRE MENT.	<u>25</u>	<u>25</u>	<u>5</u>	<u>15</u>	<u>30</u>				1.0 7	

ACCES SORY DETAC HED	1,800 SQUARE FEET IN ADDITIO N TO	<u>25</u>	<u>25</u>	5 <sup>6</sup>	<u>15</u>	2			<u>8</u>
DWEL LING UNIT	PRINCIP AL USE REQUIRE MENT.								

#### Table Notes:

- 1. Separate parcels created and approved within a larger office or commercial development may be a minimum of ten thousand 10,000 square feet.
- 2. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have corner side yards not less than twenty five 25 percent of the building width or thirty 30 percent of the building height, whichever is greater.
- 3. Plus one foot for each three feet by which the building width exceeds forty twenty-five 40 feet.
- 4. Unless the building height exceeds twenty five <u>25</u> feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty <u>50</u> feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten-<u>10</u> percent of the building width or twenty <u>20</u> percent of the building height, whichever is greater.
- 5. Transitional yards between nonresidential uses and residential districts may be required as set forth in the
   following table. Where transitional yards are provided they replace the yard requirements in the bulk regulations
   table.
  - 6. UNLESS THE ENTIRE STRUCTURE IS LOCATED ON THE REAR 25 PERCENT OF THE LOT, IN WHICH CASE ONLY TWO FEET IS REQUIRED. SEE ILLUSTRATION AT SECTION 21.60.100.
  - 7. WHERE THE FRONT, SIDE OR REAR LOT LINE OF A RESIDENTIAL LOT ADJOINS AN ACCESSIBLE AND USABLE COMMON OR PUBLIC OPEN SPACE THAT IS AT LEAST FIVE ACRES IN AREA AND OF A DEPTH PERPENDICULAR TO THE LOT LINE OF NOT LESS THAN 200 FEET, THE FLOOR AREA RATIO MAY BE INCREASED BY 20 PERCENT.
  - 8. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
  - II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

Situation	Required transitional yard (feet)	Additional requirements
Front yard coincides with an adjacent residential district	50	1. Transitional yards shall serve as a buffer and shall not be used for structures, utilities, storm and sanitary sewers, water lines, stormwater management, or signage. A waiver to this requirement may be granted by the Directors of Planning and Zoning and Public Works for access roads, parking or required utilities for good cause, provided that the disturbance to the buffer is minimized.  2. Transitional yards shall be buffered appropriately using densely planted

		vegetation designed to provide year-round cover. A fence or wall may be used in conjunction with plant material.
Interior side lot line coincides with a lot line in an adjacent residential district	30	1. Transitional yards shall serve as a buffer and shall not be used for structures, utilities, storm and sanitary sewers, water lines, stormwater management, or signage. A waiver to this requirement may be granted by the Directors of Planning and Zoning and Public Works for access roads, parking or required utilities for good cause, provided that the disturbance to the buffer is minimized.  2. Transitional yards shall be buffered appropriately using densely planted vegetation designed to provide year-round cover. A fence or wall may be used in conjunction with plant material.
Corner side yard coincides with an adjacent residential district	20	1. Transitional yards shall serve as a buffer and shall not be used for structures, utilities, storm and sanitary sewers, water lines, stormwater management, or signage. A waiver to this requirement may be granted by the Directors of Planning and Zoning and Public Works for access roads, parking or required utilities for good cause, provided that the disturbance to the buffer is minimized.  2. Transitional yards shall be buffered appropriately using densely planted vegetation designed to provide year-round cover. A fence or wall may be used in conjunction with plant material.
Rear yard coincides with a lot line in a residential district.	30	1. Transitional yards shall serve as a buffer and shall not be used for structures, utilities, storm and sanitary sewers, water lines, stormwater management, or signage. A waiver to this requirement may be granted by the Directors of Planning and Zoning and Public Works for access roads, parking or required utilities for good cause, provided that the disturbance to the buffer is minimized.  2. Transitional yards shall be buffered appropriately using densely planted vegetation designed to provide year-round cover. A fence or wall may be used in conjunction with plant material.

5

Uses permitted as a principal use in districts that do not adjoin (along non-street frontage) property zoned R1, R1A, R1B or R2. These uses are identified on the Table of Uses for Commercial and Industrial Zoning Districts, Chapter 21.48.

1. Buildings shall have a minimum separation from any residential structures of 60 feet plus an additional two feet for every one foot of building height in excess of 24 feet.

2. Parking areas shall have a minimum 24-foot buffer from adjacent residential properties.

### 21.50.240 - Bulk Regulations Table P District.

Permitted uses, special exception uses, and uses subject to specific standards	Density (minimu m sq. ft. lot area per dwelling unit)	Lot Dimensions (minimum) Area (sq. ft. or acres)	Lot Dimensio ns (minimu m) Width (ft)	Yards (minimu m) Front (ft) <sup>8</sup>	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minimu m) Rear (ft)	Height, Floor Area Ratio (maximu m) <sup>1</sup>
Clubs, recreation al and social		5,400	50	25 <sup>3</sup>	10	20	30	1.8
Day care centers, group		5,400	50	25	6	15	30	2.4
Dwellings , multifamil y	1 bedroom: 1,400 <sup>2</sup> 2 or more bedrooms : 1,800 <sup>2</sup>		50	20 3	5 4	15	30	2.4
Dwellings , single- family attached	3,600 <sup>2</sup>		16	20 <sup>3</sup>	5 4	15	30	2.4
Dwellings , single- family detached	3,600 <sup>2</sup>		50	20 <sup>3</sup>	5 4	15	30	

Dwellings , two- family	3,600 <sup>2</sup>		50 10	20 <sup>3</sup>	5 4	15	30	
Education al institution s		Bulk regulations shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulations shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulations shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulations shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	d through the site design plan review and/or planned developm ent processes , pursuant to Chapters 21.22,	Bulk regulatio ns shall be determine d through the site design plan review and/or planned developm ent processes , pursuant to Chapters 21.22, and 21.24	Bulk regulations shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24
Governme ntal uses		9	9	9	9	9	9	9
Group homes		3,600 <sup>2</sup>	50					2.4
Health and medical institution s		10,000	70	25 <sup>3</sup>	10 5	20	35	1.8
Offices, business and profession al, and nonprofit, education al, cultural, or civic			40	15 <sup>3</sup>	10 4,6	10	30	2.4 7

Planned developm ents		20,000	Bulk regulations shall be determined through the planned development, process, pursuant to Chapter 21.24.	Bulk regulations shall be determined through the planned development, process, pursuant to Chapter 21.24.	Bulk regulations shall be determined through the planned development, process, pursuant to Chapter 21.24.	Bulk regulations shall be determined through the planned development, process, pursuant to Chapter 21.24.	Bulk regulations shall be determined through the planned development, process, pursuant to Chapter 21.24.	Bulk regulations shall be determined through the planned development, process, pursuant to Chapter 21.24.
Religious institution s		10,000	70	25 <sup>3</sup>	10 5	20	35	1.8
Undertaki ng establish ments and funeral parlors	Requirem ents shall be determine d through the special exception and site plan design review process	Requirement s shall be determined through the special exception and site plan design review process	Requirem ents shall be determine d through the special exception and site plan design review process	Requirem ents shall be determine d through the special exception and site plan design review process	Requirem ents shall be determine d through the special exception and site plan design review process	ents shall be	Requirem ents shall be determine d through the special exception and site plan design review process	2.0
Other Uses	Bulk regulatio ns shall be determine d through the site design plan review, or special exception processes , pursuant to Chapters	Bulk regulations shall be determined through the site design plan review, or special exception processes, pursuant to Chapters 21.22, and 21.26.	Bulk regulatio ns shall be determine d through the site design plan review, or special exception processes , pursuant to Chapters	Bulk regulatio ns shall be determine d through the site design plan review, or special exception processes , pursuant to Chapters	Bulk regulatio ns shall be determine d through the site design plan review, or special exception processes , pursuant to Chapters	Bulk regulatio ns shall be determine d through the site design plan review, or special exception processes , pursuant to Chapters	Bulk regulatio ns shall be determine d through the site design plan review, or special exception processes , pursuant to Chapters	Bulk regulations shall be determined through the site design plan review, or special exception processes, pursuant

	21.22, and 21.26.		21.22, and 21.26.	21.22, and 21.26.	21.22, and 21.26.	21.22, and 21.26.	21.22, and 21.26.	to Chapters 21.22, and 21.26.
ACCESS ORY USES								
ACCESS ORY ATTACH ED DWELLI NG UNIT		1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>20 ³</u>	<u>5 <sup>4</sup></u>	<u>15</u>	<u>30</u>	
ACCESS ORY DETACH ED DWELLI NG UNIT <sup>12</sup>		1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>20</u>	<u>5</u> 5	<u>15</u>	<u>2</u>	

1 2

3

- 1. In the historic district, special height measurement and limits requirements apply, see Chapter 21.56.
- 2. The minimum total zoning lot area is five thousand four hundred 5,400 square feet.
- 5 3. Plus one foot for each three feet by which the building width exceeds forty 40 feet.
- 4. Unless the building height exceeds twenty five 25 feet, in which case the interior side yards shall equal one-fifth the building height. Buildings fifty 50 feet or more in overall width, as projected upon the front lot line, shall have side yards not less than ten 10 percent of the building width or twenty 20 percent of the building height, whichever is greater.
- 10 5. Plus one foot for each two feet by which the building height exceeds fifteen 15 feet.
- 6. Subject to Table Note 4, one interior side yard may be less than ten 10 feet, provided the sum of both side yards
   is at least ten 10 feet.
- 7. If seventy five 75 percent or more of the required off-street parking spaces are provided underground or in a structure, the maximum allowable floor area ratio is 3.0.
- 15 8. The front yard for principal uses shall be the minimum specified in the table or the established front yard pursuant to pursuant to Chapter 21.38.
- 9. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
- 19 10. If the lot is to be subdivided, a minimum lot width of thirty 30 feet per dwelling unit shall be provided.
- 20 11. WHERE THE FRONT, SIDE OR REAR LOT LINE OF A RESIDENTIAL LOT ADJOINS AN
- 21 ACCESSIBLE AND USABLE COMMON OR PUBLIC OPEN SPACE THAT IS AT LEAST FIVE ACRES IN
- 22 AREA AND OF A DEPTH PERPENDICULAR TO THE LOT LINE OF NOT LESS THAN 200 FEET, THE
- 23 FLOOR AREA RATIO MAY BE INCREASED BY 20 PERCENT.

12. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF
 EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
 II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE

II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

8 9 10

4

5

6

7

#### 21.50.250 - Bulk Regulations Table PM District.

11 12

- P	1		1			P			i
Permitted uses, special exception uses, and uses subject to specific standards	Densit y (mini mum sq. ft. lot area per dwelli ng unit)	Lot Dimensions (minimum) Area (sq. ft. or acres)	Lot Dimens ions (minim um) Width (ft)	Yards (minimu m) Front (ft)	Yards (minimu m) Interior Side (ft)	Yards (minimu m) Corner Side (ft)	Yards (minimu m) Rear (ft)	Floor Area Ratio (maxim um)	Height (maximum , stories and feet)
Business establish ment			65	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.

Clubs, recreational and social	5,400	50	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Day care centers, group	5,400	50	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other

									buildings: three stories not to exceed 35 feet.
Dwelling s, multifami ly	1,800		50	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Dwelling s, single- family attached		3,600	16	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and

								a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Dwelling s, single- family detached	3,600	50	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Dwelling s, two- family	3,600	50 <sup>1</sup>	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a

								maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Educatio nal institutio ns	Bulk regulations shall be determined through the site design plan review and/or planned developmen t processes, pursuant to Chapters 21.22, and 21.24		Bulk regulati ons shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulati ons shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulati ons shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulati ons shall be determined through the site design plan review and/or planned develop ment processe s, pursuant to Chapter s 21.22, and 21.24	Bulk regulati ons shall be determined through the site design plan review and/or planned development processes, pursuant to Chapters 21.22, and 21.24	Bulk regulations shall be determine d through the site design plan review and/or planned developme nt processes, pursuant to Chapters 21.22, and 21.24
Governm ental uses	2	2	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have

								a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Group	3,600	50	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. 3 2. All other buildings: three stories not to exceed 35 feet.
Offices, business and professio nal, and nonprofit,		65	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight

education al, cultural, or civic								rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
Planned developm ents	10,000	65	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.

Religious institutio ns	10,000	50	See table notes	See table notes	See table notes	30	0.75	1. Buildings with dormerless roofs with straight rafters pitched more than 20 degrees shall have a maximum cornice line of 28 feet in height and a ridgeline of 38 feet in height. <sup>3</sup> 2. All other buildings: three stories not to exceed 35 feet.
ACCESS ORY USES								
ACCESS ORY ATTAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	SEE TABLE NOTES	SEE TABLE NOTES	SEE TABLE NOTES	<u>30</u>	0.755	1. BUILDIN GS WITH DORMER LESS ROOFS WITH STRAIGH T RAFTERS PITCHED MORE THAN 20 DEGREE S SHALL HAVE A MAXIMU M CORNICE

							LINE OF 28 FEET IN HEIGHT AND A RIDGELI NE OF 38 FEET IN HEIGHT. 3 2. ALL OTHER BUILDIN GS: THREE STORIES NOT TO EXCEED 35 FEET.
ACCESS ORY DETAC HED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPA L USE REQUIRE MENT.	<u>50</u>	SEE TABLE NOTES	SEE TABLE NOTES	SEE TABLE NOTES	<u>2</u>	4

- 1. If the lot is to be subdivided, a minimum lot width of twenty five 25 feet per dwelling unit shall be provided.
  - 2. As specified by the decision-making body or official through the zoning decision-making process set forth in Division II, Administration.
  - 3. Pursuant to the procedures set forth in Chapter 21.18 of this Zoning Code, the Planning and Zoning Director may permit an extension of the maximum ridgeline to forty-five 45 feet upon findings that this would achieve a roof slope more compatible with adjacent structures and character. In no case shall the structure be more than three stories in height.
  - 4. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
  - II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN
- 5. WHERE THE FRONT, SIDE OR REAR LOT LINE OF A RESIDENTIAL LOT ADJOINS AN ACCESSIBLE AND USABLE COMMON OR PUBLIC OPEN SPACE THAT IS AT LEAST FIVE ACRES IN AREA AND OF A DEPTH PERPENDICULAR TO THE LOT LINE OF NOT LESS THAN 200 FEET, THE FLOOR AREA RATIO MAY BE INCREASED BY 20 PERCENT.

#### Front yard requirements

- 1. The required front yard is the greater of twenty feet 25 or the average setback of all structures located on parcels on the same block which THAT lie within three hundred 300 feet of either side of the property. If four or more lots are available for computation, the largest and smallest setbacks may be excluded (but not one or the other).
  - 2. Buildings fifty 50 feet or more in width:
  - a. At least thirty-three <u>33</u> percent of the building façade shall be set back thirty-five <u>35</u> feet from the front property line or <u>fifteen</u> 15 feet from the average setback line, whichever is greater.
  - b. When located on more than one lot of record, the building façade shall reflect the scale and massing of the property as would occur if the lots were developed individually.
- 3. Pursuant to the administrative adjustment procedures set forth in Chapter 21.18 of this Zoning Code, the Planning and Zoning Director may allow the front yard setback to be established by drawing a straight line between existing buildings on both sides of the new building.

#### **Interior side yard requirements:**

1

2

3

4

5

6

7

8 9

10

11

12

13

14

15

16

17

18

19

20

21

22

23 24

25

26

27

28

29

30

31

32 33

- 1. Buildings two stories or less: <u>ten10</u>-foot side yard. Buildings over two stories: <u>fifteen15</u>-foot side yard.
- 2. For buildings fifty 50 feet or more in width:
- a. Shall provide an additional one foot of side yard for each three feet the building width exceeds fifty 50 feet, and
- b. At least thirty three 33 percent of the side building façade shall be set back an additional ten 10 feet from the side property line.

#### Corner side yard requirements:

- 1. The required corner side yard is the greater of:
- a. Buildings two stories or less: ten 10 feet; buildings over two stories: fifteen 15 feet, or
- b. For buildings fifty 50 feet or more in width: a minimum twenty five 25 percent of the lot width.
- 2. For buildings fifty 50 feet or more in width:
- a. At least thirty-three  $\underline{33}$  percent of the corner side building façade shall be set back an additional ten  $\underline{10}$  feet from the corner side property line, and
- b. When located on more than one lot of record, the building façade shall reflect the scale and massing of the property as would occur if the lots were developed individually.

#### **Transitional Yard Requirements:**

In addition to required yards, in the following cases transitional yards are required as set forth in the following table:

- 1. When a PM zoned parcel lies adjacent to a parcel which THAT is zoned predominantly for residential use (sixty 60 percent or more of the adjacent parcel is zoned for residential use), and
- 2. On parcels which THAT are split zoned. In this case fifty 50 percent of the transitional yard requirement may be provided within the residentially zoned portion of the parcel.

Situation	Required transitional yard	Additional requirements
Front yard coincides with an adjacent residential district.	Same front yard as is required in the adjacent residential district.	<ol> <li>Transitional yards may not be paved or used for parking or driveways.</li> <li>Screening such as with a wall, fence or densely planted compact plantings may be required, as determined through the site plan design review process.</li> </ol>
Interior side lot line coincides with either a side or rear lot line in an adjacent residential district.	15-foot side yard	<ol> <li>Transitional yards may not be paved or used for parking or driveways.</li> <li>Screening such as with a wall, fence or densely planted compact plantings may be required, as determined through the site plan design review process.</li> </ol>
Corner side yard coincides with an adjacent residential district.	15-foot corner side yard	<ol> <li>Transitional yards may not be paved or used for parking or driveways.</li> <li>Screening such as with a wall, fence or densely planted compact plantings may be</li> </ol>

		required, as determined through the site plan design review process.
Rear yard coincides with either the side or rear lot line in an adjacent residential district.	30-foot rear yard	<ol> <li>Transitional yards may not be paved or used for parking or driveways.</li> <li>Screening such as with a wall, fence or densely planted compact plantings may be required, as determined through the site plan design review process.</li> </ol>

5

## 21.50.260 - Bulk Regulations Table MX District.

_					1			1	
Permitt ed uses, special excepti on uses, and uses subject to specifi c standar ds	Lot Dimensi ons (minimu m) Area (sq. ft. or acres)	Lot Dimensi ons (minimu m) Width (ft)	Require d Yard or Setback	Minimum Feet	Floor Area Ratio (maximu m) <sup>3</sup>	Height (maximu m, feet) 5, 8, 9	Locatio n of front façade	Open Space (perce nt of zonin g lot area) <sup>7</sup>	Living Space (minimum gross sq. ft.)
	5,400	50	1. Lot line adjoinin g a resident ial zoning district:	15 <sup>1, 2</sup>	1.75, or 2.25 for the following structures: 1. Any structure with 25 percent or more of its floor area devoted to commercial uses, or residentia l uses, or	1. Structur es located within 30 feet of a residenc e in a residenti al zoning district: 35 feet. MX-1 Height District: 65 feet. MX-2 Height	The front façade of each building shall maintain the establish ed setback of the block on which it is located. Where there is no establish	Lots 40,00 0 to 100,0 00 sf: 10 perce nt. Lots over 100,0 00 sf: 30 perce nt.	For dwellings above the ground floor of nonresiden tial uses: Efficiency apartment: 300 One bedroom apartment: 450 Two-bedroom apartment: 600 Each additional

		a combinat ion of commerc ial and residentia l uses, or 2. Any structure with the entire ground level front façade devoted to commerc ial uses 4.	District: 46 feet. MX-3 Height District: 36 feet.	ed setback, the front façade of each such building shall be set back not more than 15 feet from the face of the curb 6.		bedroom: 150
2. Any portion of a structur e over 35 feet in height:	15 plus 10 feet for each 10 feet of height above 35 feet 1,2	1.75, or 2.25 for the following structures: 1. Any structure with 25 percent or more of its floor area devoted to commerc ial uses, or residentia 1 uses, or a combinat ion of commerc ial and residentia 1 uses, or 2. Any structure	1. Structur es located within 30 feet of a residenc e in a residenti al zoning district: 35 feet. MX-1 Height District: 65 feet. MX-2 Height District: 46 feet. MX-3 Height District: 36 feet.	The front façade of each building shall maintain the establish ed setback of the block on which it is located. Where there is no establish ed setback, the front façade of each such building shall be set back	Lots 40,00 0 to 100,0 00 sf: 10 perce nt. Lots over 100,0 00 sf: 30 perce nt.	For dwellings above the ground floor of nonresiden tial uses: Efficiency apartment: 300 One bedroom apartment: 450 Two-bedroom apartment: 600 Each additional bedroom: 150

		l				
		with the entire ground level front façade devoted to commerc ial uses 4		not more than 15 feet from the face of the curb		
3. Portion s of a structur e over 46 feet in height that are not stepped back as provide d for above in 2	50 1, 2	1.75, or 2.25 for the following structures: 1. Any structure with 25 percent or more of its floor area devoted to commerc ial uses, or residentia l uses, or a combinat ion of commerc ial and residentia l uses, or 2. Any structure with the entire ground level front façade devoted to commerc	35 feet. MX-1 Height District: 65 feet. MX-2	The front façade of each building shall maintain the establish ed setback of the block on which it is located. Where there is no establish ed setback, the front façade of each such building shall be set back not more than 15 feet from the face of the curb 6.	0 to 100,0 00 sf: 10 perce nt. Lots over 100,0	For dwellings above the ground floor of nonresiden tial uses: Efficiency apartment: 300 One bedroom apartment: 450 Two-bedroom apartment: 600 Each additional bedroom: 150

4. All other yards:	As determined through the zoning decision- making process set forth in Division II, Administrat ion.	ial uses <sup>4</sup> .  1.75, or 2.25 for the following structures: 1. Any structure with 25 percent or more of its floor area devoted to commerc ial uses, or residentia l uses, or a combinat ion of commerc ial and residentia l uses, or 2. Any structure with the	district: 35 feet. MX-1 Height District: 65 feet. MX-2 Height District: 46 feet. MX-3	The front façade of each building shall maintain the establish ed setback of the block on which it is located. Where there is no establish ed setback, the front façade of each such building shall be set back	Lots 40,00 0 to 100,0 00 sf: 10 perce nt. Lots over 100,0 00 sf: 30 perce nt.	For dwellings above the ground floor of nonresiden tial uses: Efficiency apartment: 300 One bedroom apartment: 450 Two-bedroom apartment: 600 Each additional bedroom:
	Division II, Administrat	commerc ial and residentia l uses, or 2. Any structure	District: 65 feet. MX-2 Height District: 46 feet.	setback, the front façade of each such building shall be	100,0 00 sf: 30 perce	Two-bedroom apartment: 600 Each additional

ACCESS ORY USES	LOT DIMENSIO NS (MINIMUM ) AREA	ONS	YARDS (MINIM UM) FRONT (FT)	YARDS (MINIM UM) INTERI OR SIDE (FT)	YARDS (MINIM UM) CORNE R SIDE (FT)	YARDS (MINIM UM) REAR (FT)	FLOOR AREA RATIO (MAXIM UM)	HEIGHT (MAXIM UM, STORIES AND FEET)
-----------------------	---	-----	---	---	---	--	---	--

	(SQ. FT. OR ACRES)	WIDTH (FT)						
ACCESS ORY ATTACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>15</u>	<u>5</u>	<u>15</u>	<u>30</u>	1.0 11	<u>5</u>
ACCESS ORY DETACH ED DWELLI NG UNIT	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>50</u>	<u>15</u>	<u>5</u>	<u>15</u>	<u>2</u>		<u>12</u>

- 1. This yard is a transitional yard; planting or screening such as with a wall, fence or densely planted compact plantings may be required, as determined through the site plan design review process. Notwithstanding the provisions of Section 21.60.090, no obstruction (as defined by Section 21.60.090) may be located in a required yard, other than the required planting or screening.
- 2. The yard and setback requirements do not apply to the adaptive reuse of an existing structure provided that:
- a. Alterations to the existing structure do not cause any greater encroachment into the required yard than existed before the alterations; and
- b. The floor area of the structure resulting from the alterations is no greater than twice the floor area existing before the alterations.
- 3. The FAR limitations do not apply to the rehabilitation of an existing structure. As used in this subsection, "rehabilitation" is limited to the remodeling, renovation, alteration or reconstruction of an interior of the existing structure without any change in the bulk of the structure and without any remodeling, renovation, alteration or reconstruction of the structure's exterior, excepting minor cosmetic repairs and routine maintenance.
- 4. The commercial use space shall have a minimum height of twelve 12 feet and a minimum depth of twenty-five 25 feet. Non-commercial uses that may be included in this façade are limited to: i) one driveway, up to thirty-three33 feet wide, required for access to parking; ii) space required for a lobby; and iii) space required for access to upper floor uses.
  - 5. In the historic district, special height measurement and limits requirements apply, see Chapter 21.56.
  - 6. The setback is measured to the principal elements of the front façade at its closest point to the curb.
  - 7. Open space must be permanently dedicated to use in common.
- 8. The height of rooftop accessory structures, including, but not limited to, utility penthouses and architectural appurtenances shall not exceed twelve 12 feet above the maximum height under this section. No accessory structures shall exceed twenty-five 25 percent of the rooftop area on which it is affixed, except that accessory structures exceeding this height and/or area requirement may be allowed as a special exception subject to the provisions of Chapter 21.26.
- In planned developments with a minimum lot size of five acres, "Theaters, Indoor" and "Accessory Structures"
   such as clock towers, attached to office and/or retail Structures shall not exceed one hundred 100 feet in height.
- 30 10. UNLESS THE ENTIRE STRUCTURE IS LOCATED ON THE REAR 25 PERCENT OF THE LOT, IN
- 31 WHICH CASE ONLY TWO FEET IS REQUIRED. SEE ILLUSTRATION AT SECTION 21.60.100.

11. WHERE THE FRONT, SIDE OR REAR LOT LINE OF A RESIDENTIAL LOT ADJOINS AN
 ACCESSIBLE AND USABLE COMMON OR PUBLIC OPEN SPACE THAT IS AT LEAST FIVE ACRES IN
 AREA AND OF A DEPTH PERPENDICULAR TO THE LOT LINE OF NOT LESS THAN 200 FEET, THE
 FLOOR AREA RATIO MAY BE INCREASED BY 20 PERCENT.
 12. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF

12. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.

II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

#### 21.50.270 - Bulk Regulations Table C2P District.

<b>Important</b>	. The note	es at the end o	f the tabl	e are <del>as r</del>	<del>nuch a</del> pa	ert of the	law <del>as th</del>	e table its	<del>elf</del> .
Permitted uses, special exception uses, and uses subject to specific standards	Floor Area Ratio (maxim um)	Lot Area (minimum) (sq. ft.)	Lot width (minim um, feet)	Yards (minim um) Front (ft)	Yards (minim um) Interior Side (ft)	Yards (minim um) Corner Side (ft)	Yards (minim um) Rear (ft)	Height	Living Space (minim um gross sq. ft.)
All uses unless otherwise specified	2.0	1,500	20	1	0	2	30	See Chapter 21.56 (Historic District)	
Dwellings above the ground floor of nonreside ntial uses	2.0	No additional lot area requirement							Efficie ncy apartm ent: 300 One bedroo m apartm ent: 450 Two- bedroo m apartm ent: 600 Each additio nal

									bedroo m: 150
ACCESS ORY USES									
ACCESS ORY ATTACH ED DWELLI NG UNIT	2.0	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>20</u>	1	<u>0</u>	2	<u>30</u>	SEE CHAPT ER 21.56 (HISTO RIC DISTRI CT)	
ACCESS ORY DETACH ED DWELLI NG UNIT	2.0	1,800 SQUARE FEET IN ADDITION TO PRINCIPAL USE REQUIREM ENT.	<u>20</u>	1	<u>0</u>	2	<u>2</u>	<u>3</u>	

1

3

4

5

6

7

8

10

11 12

13

14 15 16

17 18

- 1. Front yards are not required, except in the case of an established front yard pursuant to Chapter 21.38.
- 2. Corner side yards are not required, except in the case where there is an established front yard in the remainder of the block. In those cases, the corner side yard shall be provided in accordance with the established-front-yard regulations pursuant to Chapter 21.38.
- 3. I. EXCEPT AS PROVIDED IN SUBSECTION II OF THIS NOTE, MAXIMUM CORNICE HEIGHT OF EIGHT FEET AND MAXIMUM RIDGE HEIGHT OF 16 FEET.
- II. THE CORNICE AND RIDGE HEIGHTS OF AN ACCESSORY STRUCTURE MAY INCREASE ONE FOOT FOR EACH ONE FOOT OF ADDITIONAL SETBACK PROVIDED BEYOND THE MINIMUM YARD REQUIREMENTS SPECIFIED IN THE BULK REGULATIONS TABLE, UP TO A MAXIMUM HEIGHT OF TWO STORIES AND A CORNICE HEIGHT OF 16 FEET AND A RIDGE HEIGHT OF COMPATIBLE DESIGN.

#### Chapter 21.64 - Standards for Uses Subject to Standards SECTION 21.64.005 - PURPOSE AND APPLICATION OF STANDARDS.

- A. THIS CHAPTER LISTS THE STANDARDS THAT APPLY TO USES LISTED AS
   SUBJECT TO STANDARDS IN THE USE TABLES CHAPTER 21.48 OF THIS ZONING
   CODE.
- 22 B. IN THE CASE OF A USE REQUIRING SPECIAL EXCEPTION APPROVAL, THE
  23 STANDARDS FOR THE USE SET FORTH IN THIS CHAPTER SHALL BE MET IN
  24 ADDITION TO THE GENERAL STANDARDS FOR APPROVING A SPECIAL
  25 EXCEPTION.

#### Section 21.64.010 - Purpose and application of standards.

- A. This chapter lists the standards that apply to uses listed as subject to standards in the use tables Chapter 21.48 of this Zoning Code.
- B. In the case of a use requiring special exception approval, the standards for the use set forth in this chapter must be met in addition to the general standards for approving a special exception.

# Section 21.64.010 - ACCESSORY ATTACHED DWELLING UNIT AND ACCESSORY DETACHED DWELLING UNIT

- A. THE RECORD OWNER OF THE PROPERTY SHALL RESIDE ON THE PREMISES.
- B. THE ACCESSORY DWELLING UNIT, WHETHER ATTACHED OR DETACHED, MAY NOT EXCEED 1,000 SQUARE FEET.
- C. ONLY ONE ACCESSORY DWELLING UNIT IS PERMITTED PER PRINCIPAL USE
- D. THE PROPERTY OWNER SHALL MAINTAIN A VALID USE AND OCCUPANCY PERMIT FOR THE ACCESSORY DWELLING UNIT IN ACCORDANCE WITH CHAPTER 21.12, USE AND OCCUPANCY PERMITS.
- E. IF THE PRINCIPAL USE REQUIRES A SPECIAL EXCEPTION APPROVAL, THE ACCESSORY USE REQUIRES A SPECIAL EXCEPTION APPROVAL.

## Chapter 21.66 - PARKING AND LOADING REGULATIONS Section 21.66.130 - Table of off-street parking requirements.

Use	Standard	Additional Provisions
Amusement establishments, indoor.	Number of spaces to be determined through the use and site development plan approval process. Guidelines for determining the appropriate number of parking spaces are:  Amusement Arcades: one vehicle parking space per four amusement machines, plus one bicycle parking space per machine.  Pools and rinks: Spaces sufficient to serve 30 percent of the capacity in persons of the facility.  Additional spaces for auxiliary uses such as bars, and restaurants: one space per 300 hundred square feet.	
Animal hospitals, including veterinarian offices	Two spaces per employee.	
Apartment hotels	One space per dwelling unit or lodging room.	

Lodging rooms located in apartment hotels	One space per three rooms.	
Bakeries	One space per 200 square feet.	
Banks and financial institutions	One space per 300 square feet.	
Bars and taverns	Spaces equal to 30 percent of the capacity in persons.	
Bed and Breakfast Homes		
C1 and C1A districts	None required.	Bed and breakfast homes without off-street parking must SHALL purchase City garage parking passes for guests.
R-2 Neighborhood Conservation district. R-3-Neighborhood Conservation 2 district	One or two guest rooms: one space. Three guest rooms: three spaces. Four guest rooms: four spaces. Five guest rooms: five spaces.	
R-3-Neighborhood Conservation district	One space per guest room, one space for owner and one space per nonresidential employee.	
Boat showrooms	Two spaces per employee.	
Building material sales	One space per two employees, plus one space for each 300 square feet of gross floor area in excess of 4,000 square feet	
Clubs, lodges and meeting halls.	Spaces sufficient to serve 30 percent of the capacity in persons of the facility, plus one space per lodging room, if provided.	
Conference facilities	Spaces sufficient to serve 30 percent of the capacity in persons of the facility.	
Contractors', architects' and engineers' offices, shops and yards	I-1 district: one space per two employees. Other districts: one space per employee.	
Day care, family	One space per nonresidential employee.	
Day care centers, group	One space per five children.	
Delicatessens	See Restaurants.	
Dwellings		
DWELLING UNIT, ACCESSORY ATTACHED AND DETACHED	ONE SPACE PER ACCESSORY UNIT IN ADDITION TO OTHERWISE REQUIRED PARKING	
Dwellings, multi-family	C1, C2P, P, PM2 districts: one space per dwelling unit. BCE district: 1.8 spaces per dwelling unit. Other districts 1.5 spaces per dwelling unit.	

D 111		
Dwellings, multi-family containing six or fewer dwelling units	One space per dwelling unit.	This use is permitted subject to standards in the R3-Neighborhood Conservation district.
Dwellings, single-family attached	Two spaces per dwelling unit.	
	R1B District: Two spaces per dwelling	
Dwellings, single-family detached	unit. Other districts: One space per dwelling unit.	
Dwellings, two-family	One space per dwelling unit.	
Dwellings above the ground floor of nonresidential uses	One space per dwelling unit.	
Dwellings for watchmen	One space per dwelling unit.	
Educational Facilities and Schools		
Colleges, private	One space per six students	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty-four 24-hour period.
Fraternities, sororities and dormitories	One parking space for each three active members or dormitory residents, plus one space for the manager.	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty four 24-hour period.
Gymnasiums, stadiums and grandstands	One space per eight seats.	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty four 24-hour period.
School, nursery or elementary	One space per two employees.	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty-four 24-hour period.
Schools, middle, or high	One space per two employees, plus one space per ten 10 (nonboarding) students.	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty four 24-hour period.
School auditoriums	One space per eight seats.	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty four 24-hour period.

Schools, commercial, trade, vocational, music, dance, or art	BCE district: one space per employee. Other districts: one space per two employees, plus one space per five students.	Standards based on the number of students shall be based on the maximum number of students attending classes on the premises at any one time during any twenty four 24-hour period.
--	---	---

#### **Table Notes:**

- 1. Calculation Rules.
- A. Unless stated otherwise in the table, when the standard is given in square feet the standard means the number of parking spaces per square footage of gross floor area. See THE definition of "floor area" in Division VI for areas to be included in the calculation.
- B. When the number of off-street parking spaces required by the table results in a fraction, any fraction of one-half or less may be disregarded, while AND a fraction over one-half is counted as one parking space.
- C. Parking spaces required on an employee basis shall be based on the maximum number of employees on duty or residing, or both, on the premises at any one time.
- 2. *Drive-In Businesses*. Stacking spaces, equal in number to five times the maximum capacity of a drive-in business, for automobiles awaiting entrance into the drive-in business, shall be provided.
- 3. *Use Not Included in the Table*. Alternative parking and loading standards may be proposed for uses not included in the table, pursuant to Section 21.66.040.
- 4. *C2 and C2A Districts*. Off-street parking facilities are not required in the C2 or C2A districts except that uses containing twenty thousand 20,000 feet or more of floor area must SHALL provide twenty 20 parking spaces, plus one space for each additional five hundred 500 square feet of floor area.
- 5. *MX District*. Unless alternative parking standards are approved by the Department of Planning and Zoning pursuant to Section 21.66.040, commercial uses not specifically enumerated in the Table of Off-Street Parking Requirements shall provide one parking space for each three hundred 300 square feet of gross floor area.
- 6. WMC District. Off-street parking facilities are not required in the WMC District except that (1) uses containing fifteen thousand 15,000 feet or more of floor area must SHALL provide fifteen 15 parking spaces, plus one space for each additional five hundred 500 square feet of floor area, and (2) parking shall be provided for exterior maritime uses as set forth in Section 21.66.130.

## Chapter 21.72 - TERMS AND DEFINITIONS Section 21.72.010 - Terms.

A. **Construction**. In the construction of this Zoning Code, the rules and definitions contained in this chapter shall be observed and applied, except when the context clearly indicates otherwise.

B. **Definitions**. Except as provided for elsewhere in this Zoning Code, terms used in this Zoning Code shall have the definition provided in any standard dictionary, unless specifically defined below or in any other provision of this Zoning Code.

#### C. Generic Definitions.

- 1. Purpose of Generic Definitions. Certain terms in this chapter are defined to be inclusive of many uses in order to eliminate overly detailed listings of uses in the zoning districts established by this title. These terms are referred to in this title as "generic" definitions. Examples of generic definitions used in this title are "retail goods establishment," "amusement establishment" and "light manufacturing."
- 2. Components of Generic Definitions. A generic definition has three components: (1) a brief listing of examples of uses intended to be included within the scope of the definition;

1 2 3		(2) an identification (where appropriate) of certain uses which THAT are not meant to be included by the term; and (3) a statement that for the purposes of each zoning district, any other uses specifically listed within the particular zoning district shall not be construed as
4	2	falling within the generic definition.
5	3.	1
6		specifically listed in a zoning district, or which THAT does not fall within a generic
7		definition as defined in this chapter, or as interpreted by the Director of Planning and
8		Zoning pursuant to Chapter 21.16 is prohibited.
9		
10	D. Li	st of Definitions.
11		
12		<b>REVISOR'S NOTE</b> : In this section, the terms "Accessory Attached Dwelling Unit" and
13		"Accessory Detached Dwelling Unit" are added.
14		
15		No other changes are made.
16		
17	A	ccessory building or use. See Use, accessory.
18		
19		ACCESSORY ATTACHED DWELLING UNIT," SEE "DWELLING UNIT,
20	A	CCESSORY ATTACHED"
21		
22		ACCESSORY DETACHED DWELLING UNIT," SEE "DWELLING UNIT,
23	A	CCESSORY DETACHED"
24	"1	Dwelling" manns a huilding or nortion of a huilding designed or used avaluatively for
25		Owelling" means a building, or portion of a building, designed or used exclusively for
26	re	sidential occupancy. Includes the following unit types:
27		a. Single-family detached dwellings,
28		b. Single-family attached dwellings,
29		c. Multifamily dwellings,
30		d. Two-family dwellings <del>, and</del>
31		e. Dwellings above the ground floor of nonresidential uses-, F. ACCESSORY ATTACHED DWELLING UNITS, AND
32		G. ACCESSORY DETACHED DWELLING UNITS"
33		G. ACCESSORT DETACHED DWELLING UNITS
34	т	he term "dwelling" does not include house trailers and hotels.
35	1	the term dwelling does not include house trailers and noters.
36	D	welling, Multi-Family. See illustration. "Multi-family dwelling" means a building, or
37		ortion of a building, containing three or more dwelling units.
38 39	pe	or a building, containing tiffee of filore dwelling utilits.
39 40	D	welling, Single-Family Detached. See illustration. "Single-family detached dwelling"
41		leans a building containing one dwelling unit that is surrounded entirely by open space
42		the same lot.
42 43	O.	i the same lot.
43 44	D	welling, Single-Family Attached. See illustration. "Single-family attached dwelling"
77	D	woming, origio I aminy records. See musuation. Single-failing attached dwelling

means one of a series of two or more dwellings that can be joined to another dwelling at

or more sides by a party wall or walls, with each unit having its own separate


45

46

one

1	exterior entrance(s). For example, townhouse, rowhouse, two-family dwelling, and
2	quadraplex units are single-family attached dwellings.
3	
4	Dwelling, Two-Family. See illustration. "Two-family dwelling" means a building
5	containing two dwelling units. Examples:
6	a. A detached dwelling containing an apartment is a two-family detached dwelling.
7	b. A duplex is a two-family detached dwelling with the units separated by one vertical
8	party wall without openings extending from the basement floor to the roof along the
9	dividing lot line.
10	
11	"Dwelling unit" means any habitable room or a group of adjoining habitable rooms
12	located within a dwelling and forming a single unit with facilities which are used or
13	intended to be used for living, sleeping, cooking and eating of meals.
14	
15	
16	Explanation:
17	UPPERCASE indicates matter added to existing law.
18	Strikethrough indicates matter stricken from existing law.
19	<u>Underlining</u> indicates amendments.
20	

#### Illustrations for dwelling unit definitions

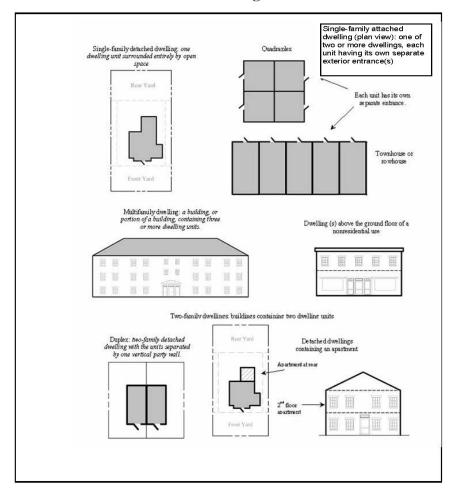

"DWELLING UNIT, ACCESSORY ATTACHED" MEANS AN INDEPENDENT SELF-CONTAINED DWELLING UNIT LOCATED WITHIN A SINGLE-FAMILY DETACHED DWELLING.

"DWELLING UNIT, ACCESSORY DETACHED" MEANS AN INDEPENDENT SELF-CONTAINED DWELLING UNIT LOCATED ON THE SAME LOT AS A SINGLE-FAMILY DETACHED DWELLING.

SECTION II: AND BE IT FURTHER ESTABLISHED AND ORDAINED BY THE ANNAPOLIS CITY COUNCIL that this ordinance shall take effect from the date of its passage.

#### **Explanation:**

UPPERCASE indicates matter added to existing law. Strikethrough indicates matter stricken from existing law. Underlining indicates amendments.